

Code: IPC-B26E-IMOU

IP CAMERA **IPC-B26E-IMOU** Wi-Fi Cell Pro - 1080p 2.8 mm

Net: **58.01 EUR** Gross: **58.01 EUR**

The Cell Pro product series is a 100% wireless monitoring system that supports up to 6 cameras. Thanks to the battery power, you can place them anywhere without any wiring problems. In combination with the user friendly IMOU platform, the IMOU series devices allow anyone to create a simple and effective surveillance system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. The used Wi-Fi module allows to remote communication with camera for max. distance up to 50 m.

The device is ideal for eg. as a baby monitor, with mobile image view on smartphone and possibility of bi-directional audio transmission. Camera is according to IP65 Index of Protection norm.

Attention! The camera does not work autonomously - a base station is required for operation. The camera is not supported by the mobile application - it connects to the base station that has access to the Internet.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm
View angle:	110 °
Range of IR illumination:	10 m
Audio:	• Microphone built-in, • Speaker built-in, • Bi-directional audio streaming support
Image compression method:	H.265 / H.264
Main stream frame rate:	20 fps @ 1080p
Network protocols:	TCP, DHCP
ONVIF:	—
Network interface:	Wi-Fi - IEEE 802.11 b/g/n
Mobile phones support:	Access by a cloud (P2P)
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	DHCP
Web browser access ports:	—
PC client access ports:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile client access ports:	—
Port ONVIF:	—
WEB Server:	—
RTSP URL:	—
Memory card slot:	—
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, Range : 50 m (open area), • micro USB socket • PIR detector - Built-in • Estimated battery operation time : to 3 months
Power supply:	• Li-Ion battery : 7.6 V / 2300 mAh • 5 V DC / 1 A (power adapter not included)
Power consumption:	≤ 3 W
"Index of Protection":	IP65
Operation temp:	-20 °C ... 45 °C
Weight:	0.23 kg
Dimensions:	77 x 77 x 72 mm (without bracket)
Supported languages:	—
Manufacturer / Brand:	DAHUA / IMOU
Guarantee:	2 years

PRESENTATION



Side view:



Bottom view:




Place for battery:



Port mini USB:



Bracket dimensions:

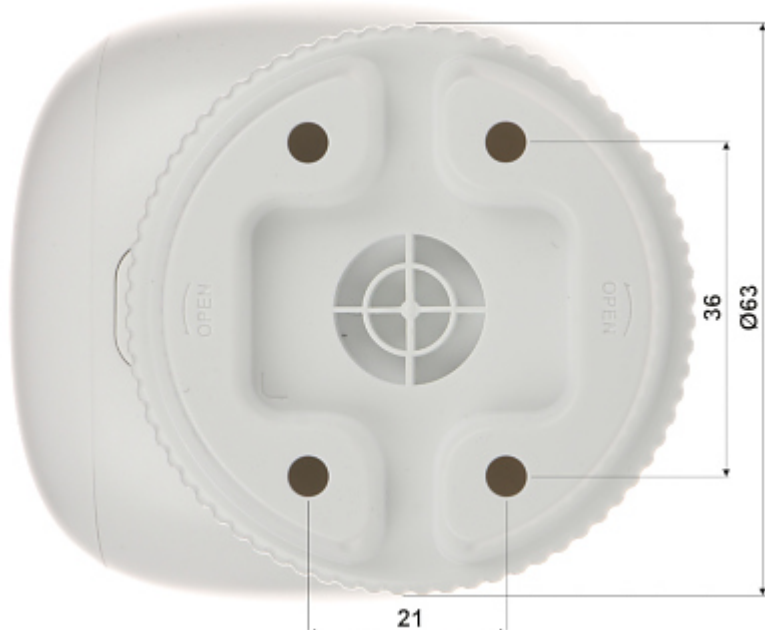

In the kit:



OUR OPINIONS



- Very small camera dimensions.



- The camera does not work autonomously - a base station is required for operation.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

