

Code: BCS-P-624R3SA

IP CAMERA **BCS-P-624R3SA** - 4.0 Mpx 1.6 mm - Fish Eye BCS POINT

Net: **325.00 EUR** Gross: **325.00 EUR**

IP camera with "fish eye" wide-angle lens.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4 Mpx
Scanning system:	Progressive
Resolution:	2592 x 1520 - 4.0 Mpx 2560 x 1440 - 3.7 Mpx , 2048 x 1440 - 3.0 Mpx 1920 x 1080 - 1080p
Lens:	1.6 mm - Fish Eye / F1.6
View angle:	185 °
S/N ratio:	> 55 dB
Range of IR illumination:	10 m
RS-485 interface:	—
Image compression method:	H.265 / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• Microphone built-in • External microphone input • Audio output • Bi-directional audio streaming support
Bitrate:	128 ... 16384 kbps
Main stream frame rate:	20 fps @ 4.0 Mpx 25 fps @ 3.7 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	L2TP, IPv4/IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, QoS, DNS, DDNS, NTP, FTP, UPnP, HTTP, SMTP, SNMP, P2P, IEEE 802.1x

Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
WEB Server:	Built-in
Max. number of on-line users:	10
ONVIF:	2.4
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) • Android: Free application BCS Point • iOS (iPhone): Free application BCS Point
Default admin user / password:	admin / 123456
Default IP address:	DHCP
Web browser access ports:	80, 554
PC client access ports:	80
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://192.168.1.66:554/unicast/c1/s0/live - Main stream rtsp://192.168.1.66:554/unicast/c1/s1/live - Sub stream
Main features:	• WDR - 120 dB - Wide Dynamic Range • 2D-DNR, 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • Additional "Spot" CVBS output - allows to quick view the image from camera and its configuration without the need to disconnect it from monitoring system • ICR - Movable InfraRed filter • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Motion Detection - max. 4 zones • Privacy zones - max. 4
Power supply:	• PoE (802.3af), • 12 V DC / 920 mA
Power consumption:	≤ 11 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP66
Vandal-proof:	—
Operation temp:	-40 °C ... 60 °C
Weight:	0.38 kg
Dimensions:	Ø 125 x 44 mm
Supported languages:	English, German, Polish, Russian, Slovenian
Manufacturer / Brand:	BCS POINT
Guarantee:	3 years

PRESENTATION

View after remove the cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Memory card slot:



Mounting side view:




Camera dimensions:

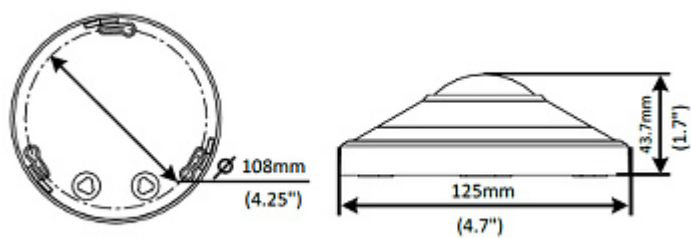


Camera connectors:



Connectors description:

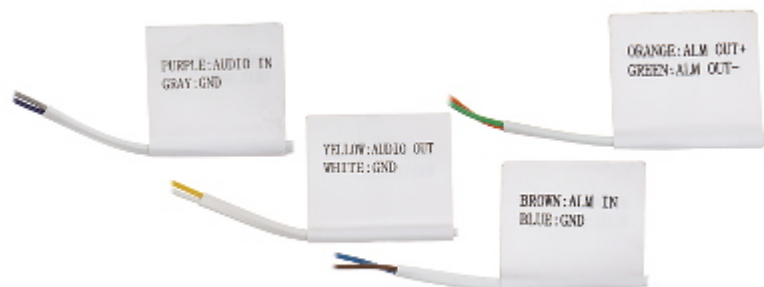

Operation modes:

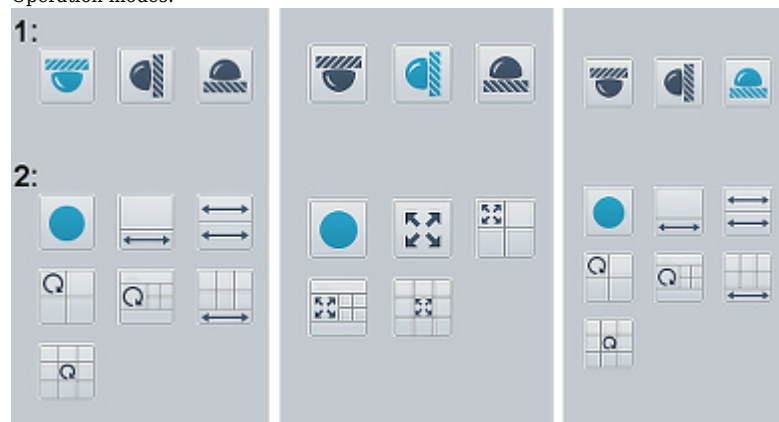

1. Installation type

2. Display modes

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

