

Code: DS-2CD6362F-IVS(1.27MM)

IP VANDALPROOF CAMERA **DS-2CD6362F-IVS(1.27MM)** - 6.3 Mpx Hikvision

Net: **806.92 EUR** Gross: **992.51 EUR**

IP camera with "fish eye" wide-angle lens.
Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	6.3 Mpx
Scanning system:	Progressive
Resolution:	3072 x 2048 - 6.3 Mpx , 2048 x 2048 - 4.2 Mpx , 1280 x 1280 - 1.6 Mpx
Lens:	1.27 mm - Fish Eye / F2.6
View angle:	180 °
Range of IR illumination:	15 m
S/N ratio:	> 50 dB
RS-485 interface:	✓
Image compression method:	H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in• External microphone input• Speaker built-in• Audio output• Bi-directional audio streaming support
Bitrate:	256 ... 16384 kbps
Main stream frame rate:	25 fps @ 6 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, Bonjour
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application iVMS-4500, Android: Free application Hik-Connect• iOS (iPhone): Free application iVMS-4500, iOS (iPhone): Free application Hik-Connect
Default IP address:	192.168.1.64

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Default admin user / password:	admin / -
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P)
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> • Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
ONVIF:	2.4
Max. number of on-line users:	20
Main features:	<ul style="list-style-type: none"> • Intelligent Image Analysis : crossing the line (tripwire), intrusion • Heat map - the selection in the image by corresponding colors the areas with different traffic • 3D-DNR - Digital Noise Reduction • Anti-Flicker - The technology eliminates the tiring eyes flickering image effect • Possibility to change the resolution, quality and bit rate • Time mark and image description • Image rotation and mirror • Configurable: brightness, contrast, saturation • Privacy zones • Motion Detection
Vandal-proof:	IK10
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 0.78 A
Power consumption:	≤ 9.4 W
Housing:	Dome - Metal
Color:	White
Operation temp:	-30 °C ... 60 °C
"Index of Protection":	IP66
Weight:	0.672 kg
Dimensions:	164 x 153 x 50 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	300804024
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Camera view after remove the Dome cover:



Memory card slot:



Mounting side view:

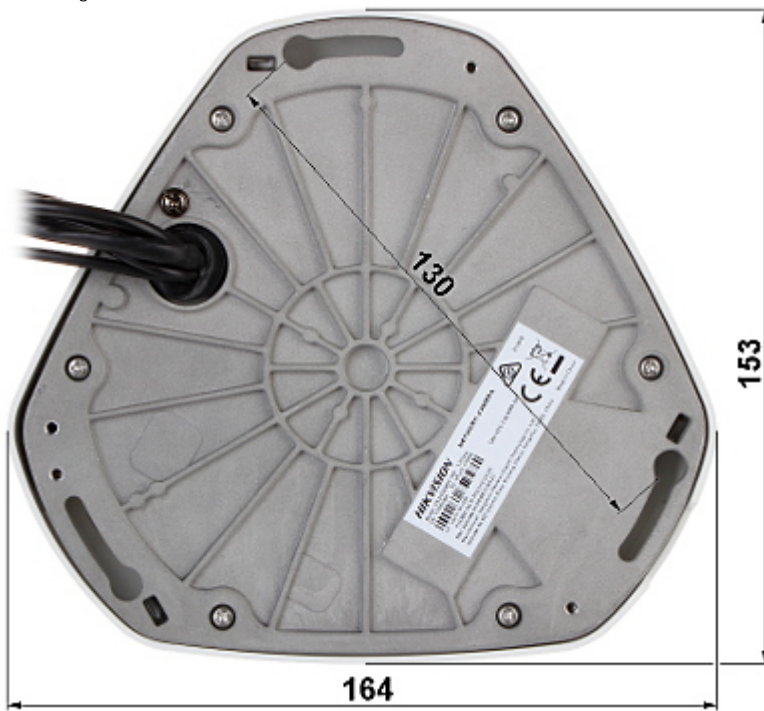

Camera connectors:



Display modes:

:

In the kit:

