

Code: IPC-EW5541-AS

IP CAMERA **IPC-EW5541-AS** - 5 Mpx 1.4 mm - Fish Eye DAHUA

Net: **474.79 EUR** Gross: **474.79 EUR**

IP camera with "fish eye" wide-angle lens.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2592 x 1944 - 5 Mpx , 2048 x 1536 - 3 Mpx , 1600 x 1200 - 2 Mpx , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	1.4 mm - Fish Eye
View angle:	180 °
Range of IR illumination:	10 m
S/N ratio:	> 56 dB
RS-485 interface:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in• External microphone input• Audio output• Bi-directional audio streaming support
Main stream frame rate:	25 fps @ 5 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, TCP, UDP, ARP, RTP, RTCP, RTSP, RTMP, SMTP, FTP, SFTP, DHCP, DNS, DDNS, QoS, UPnP, NTP, Multicast, ICMP, IGMP, NFS, PPPoE, SNMP
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Default admin user / password:	admin / - The administrator password should be set at the first start

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	✓
Main features:	<ul style="list-style-type: none"> • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • SSA - Smart Scene Adaptive - intelligent scene adaptation by automatically adjusting the exposure parameters to obtain a better image • BLC/HLC - Back Light / High Light Compensation • Configurable: brightness, contrast, saturation • AGC - Automatic Gain Control • Possibility to change the resolution, quality and bit rate • Auto White Balance • Privacy zones - max. 4 • Motion Detection - max. 4 zones • Heat map - the selection in the image by corresponding colors the areas with different traffic • IVS analysis - crossing the line (tripwire), intrusion, counting people in a given area - support for 4 independent detection areas - Statistical Reporting
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 610 mA
Power consumption:	<ul style="list-style-type: none"> • ≤ 8.8 W @ PoE • ≤ 7.3 W @ 12 V DC
Housing:	Dome - Metal + Plastic
Vandal-proof:	—
Color:	White + Black
Operation temp:	-10 °C ... 50 °C
Weight:	0.32 kg
Dimensions:	Ø 126 x 45 mm
Supported languages:	Polish, English, Czech, French, Italian, Spanish, Dutch, German, Portuguese, Russian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Memory card slot and "Reset" button:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Dimensions:

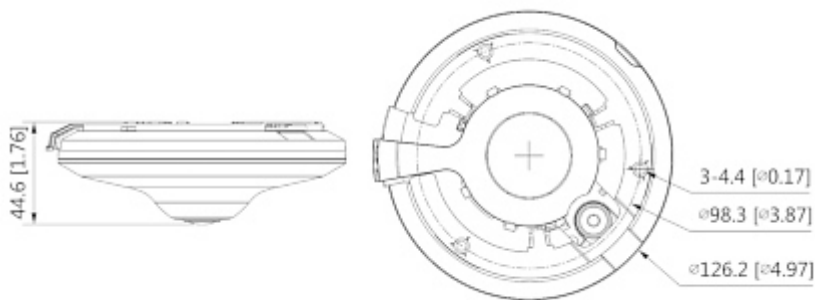

Camera connectors:



See how to initialize DAHUA cameras:

:

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

