

Code: DH-IPC-HUM4001P

IP CAMERA **DH-IPC-HUM4001P** PINHOLE - 720p 3.6 mm DAHUA

Net: **152.61 EUR** Gross: **152.61 EUR**



Indoor micro camera equipped with very good quality CMOS sensor. Camera is equipped with PINHOLE type lens, needs only a very small hole to get right field of view. Included camera software enables management and integrated monitoring of many network cameras.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/4 " Progressive Scan CMOS
Matrix size:	1.0 Mpx
Resolution:	1280 x 720 - 720p 704 x 576 - D1
Lens:	3.6 mm (pinhole)
View angle:	• 77 ° (manufacturer data) • 59 ° (our tests result)
Min. illumination:	• 0.01 Lux / F1.2 (color), • 0.001 Lux / F1.2 (B/W)
S/N ratio:	> 56 dB
Audio:	—
RS-485 interface:	—
RS-232 interface:	—
Bitrate:	5 kbps ... 6144 kbps - H.264
Main stream frame rate:	25 fps @ 1280 x 720
Network protocols:	HTTP, TCP, ARP, RTSP, RTP, UDP RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, SNMP, QoS, UPnP, NTP
ONVIF:	2.42
Image compression method:	H.264 / MJPEG

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network interface:	10/100 Base-T (RJ-45)
Alarm inputs / outputs:	—
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS , Android: Free application IMOU • iOS (iPhone): Free application DMSS , iOS (iPhone): Free application IMOU
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Memory card slot:	—
Power supply:	12 V DC / 160 mA
Power consumption:	< 2 W
Main features:	• BLC - Back Light Compensation • HLC - High Light Compensation (spot) • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Configurable Privacy Zones • IVS analysis - face detection
Length of the cable:	55 cm
Operation temp:	-30 °C ... 60 °C
Weight:	0.050 kg
Dimensions:	30 x 30 x 29 mm
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera is very small:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:




Camera connectors:

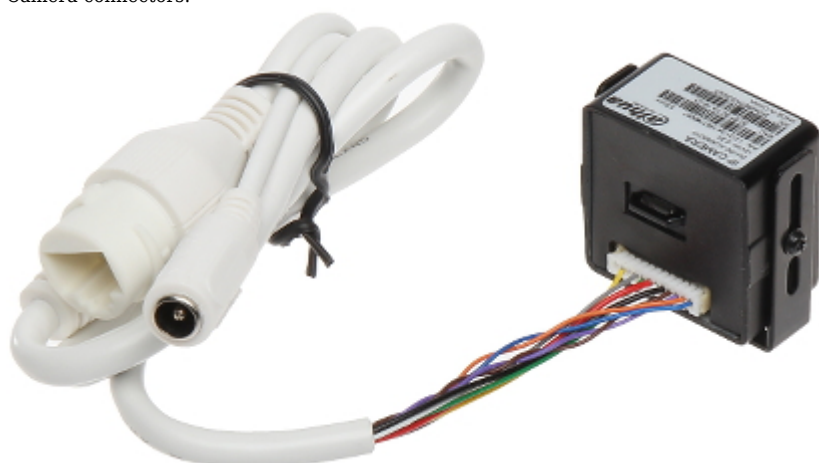

Camera dimensions:

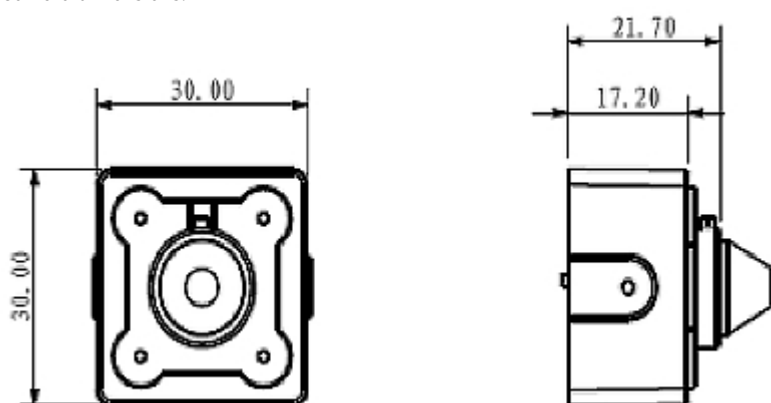

In the kit:

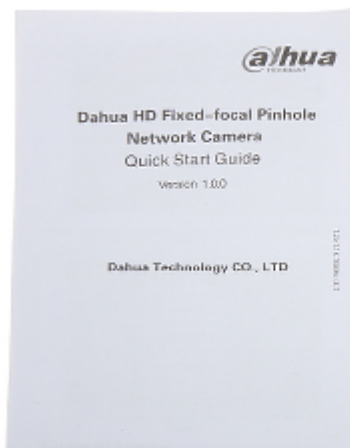

See the ability of operation in imou cloud:
:

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:



Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



OUR OPINIONS



- Very small camera dimensions.



- Camera sensitivity parameter is lower than value declared by the manufacturer.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

