

Code: BCS-L-PIP14FW

IP CAMERA **BCS-L-PIP14FW** PINHOLE - 4 Mpx 2.8 mm BCS Line

Net: 2 369.33 DKK Gross: 2 369.33 DKK

Indoor micro camera equipped with very good quality CMOS sensor. The camera has extensive functions of intelligent image analysis.

Camera is equipped with PINHOLE type lens, needs only a very small hole to get right field of view. Camera has microphone and audio output built-in.



SPECIFICATION

Standard:	IP
Resolution:	2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Sensor:	1/3 " Progressive Scan CMOS
Lens:	2.8 mm @ F2.0 (pinhole)
View angle:	96 °
Range of IR illumination:	—
Memory card slot:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	• Audio input • Microphone built-in, • Audio output • Bi-directional audio streaming support
Main stream frame rate:	• 20 fps @ 4 Mpx • 25 fps @ 3.7 Mpx
Interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Max. number of on-line users:	20
ONVIF:	✓
Intelligent image analysis:	• intrusion • crossing the line (tripwire)
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Configurable Privacy Zones • Motion Detection • AWB - Auto White Balance • AGC - Automatic Gain Control • AES - Auto Electronic Shutter • Day/night mode • ICR - Movable InfraRed filter • Mirror - Mirror image • D-ZOOM - Digital Zoom : 16 x
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application BCS Manager • iOS (iPhone): Free application BCS Manager
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Power supply:	12 V DC / 150 mA
Power consumption:	max. 1.8 W
Housing:	Mini - Metal
Color:	Black
"Index of Protection":	—
Mechanical protection class:	—
Operation temp:	-40 °C ... 60 °C
Weight:	0.08 kg
Dimensions:	• 44 x 35 x 30 mm • 50 cm (cable length)
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Romanian, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	BCS Line
Guarantee:	3 years

PRESENTATION

Camera is very small:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Front view:




Rear view:



Camera connectors:



Camera dimensions:

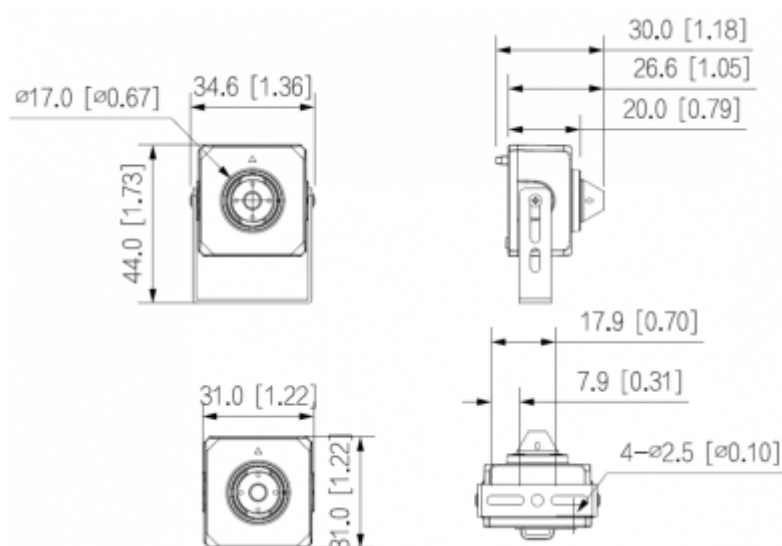

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

