

Code: KTD02(F)

VIDEO DOORPHONE KIT **KTD02(F)** DAHUA

Net: **575.14 EUR** Gross: **575.14 EUR**

2-wire IP video doorphone kit with a 7-inch touch screen monitor, the possibility of alarm integration and a remote intercom from the mobile application. It can be also used as simple alarm control panel, or notification module by the support 6 alarm inputs. Video Doorphone is mounted in a flush-mounted housing.

The set includes: VTH2622GW-W indoor panel, VTO2202F-L video doorphone, VTM114 flush-mounted housing and 48V/1.25A switching adapter.

ATTENTION! The device does not support the Dahua analogue system.



SPECIFICATION

Sensor:	2 Mpx CMOS
Lens:	1.9 mm
View angle:	169 °
proximity reader built-in:	—
Image compression method:	H.265, H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Main features:	• Micro SD memory cards up to 64GB support (possible local recording), • LED diodes, • Door status detection, • WDR - 120 dB - Wide Dynamic Range, • 3D-DNR - Digital Noise Reduction, • Day/night mode, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Echo suppression and reduction / digital noise reduction, • Tamper detection - removing from mounting surface, • SOS support ,
Power supply:	• 2-Wire interface • 48 V / 1.25 A
Power consumption:	≤ 6 W
Housing:	Aluminum
Color:	Silver

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

"Index of Protection":	IP65
IK rating:	IK07
Operation temp:	-30 °C ... 60 °C
Weight:	0.33 kg
Dimensions:	130 x 96 x 40.5 mm

INDOOR PANEL:

Shield:	7 " capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	—
Main features:	• Wi-Fi module - 2.4 GHz IEEE 802.11 b/g/n, • Protections : WPA/WPA2, WPA-PSK/WPA2-PSK, • IP Dahua cameras support, • SOS support, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Echo suppression and reduction / digital noise reduction, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Receive and view the published information from the management center, • DND mode
Controlling:	capacitive touch screen
Alarm inputs:	6 (1 - as a bell)
Alarm outputs:	1
Power supply:	• 2-Wire interface • 48 V / 1.25 A
Power consumption:	≤ 6 W (operation) ≤ 2 W (standby)
Operation temp:	-10 °C ... 55 °C
Housing:	Plastic (PC + ABS)
Color:	White
Weight:	0.34 kg
Dimensions:	190 x 135 x 26 mm

ENCLOSURE:

Material:	Aluminum
Color:	Silver
Weight:	0.5 kg
Internal dimensions:	124 x 90 x 25 mm
External dimensions:	163 x 129 x 40 mm

POWER SUPPLY ADAPTER:

Input voltage:	100 ... 240 V AC
AC input frequency:	50 / 60 Hz
Output voltage:	48.0 V DC
Output current:	1.25 A
Output power:	60.0 W
Connector:	2.1/5.5 mm plug on the cable



LED indicators:	—
Housing:	Plastic
Weight:	0.25 kg
Dimensions:	125 x 47 x 32 mm
General information:	
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Connectors view:

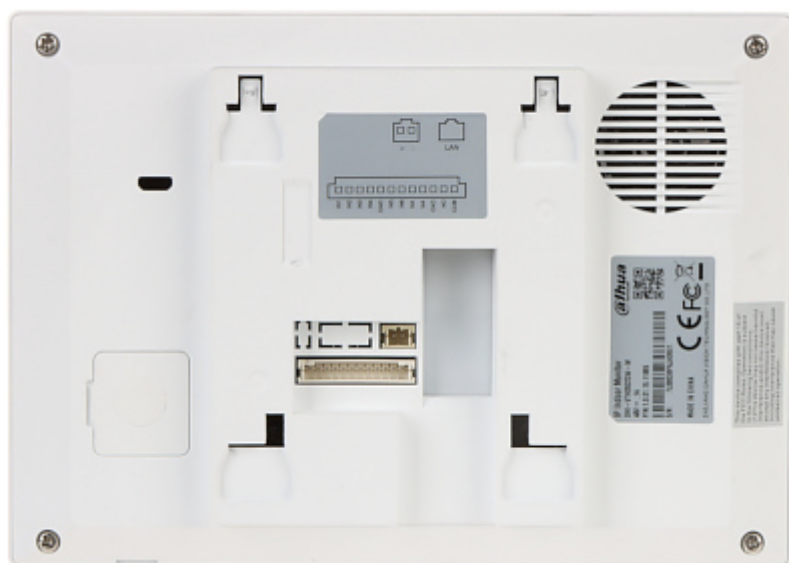


VIDEO DOORPHONE:



Rear view:



Connectors view:

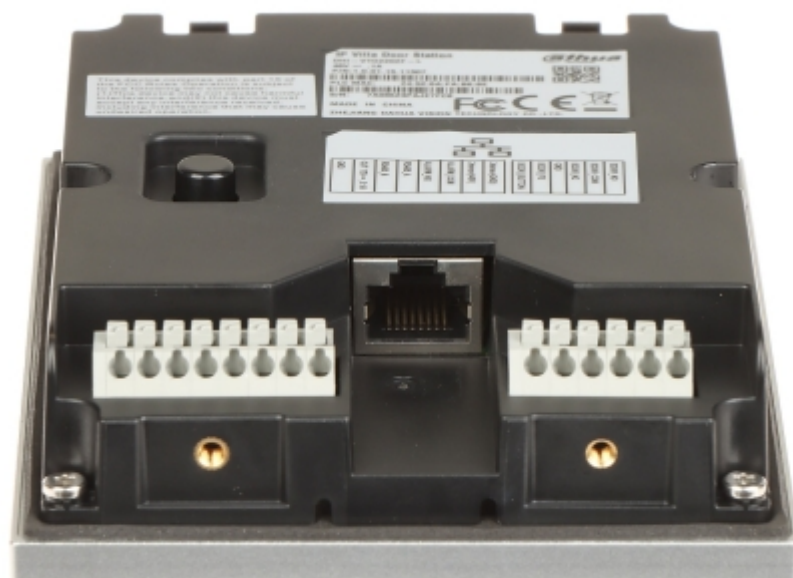

Memory card slot:




ENCLOSURE:



Front view:




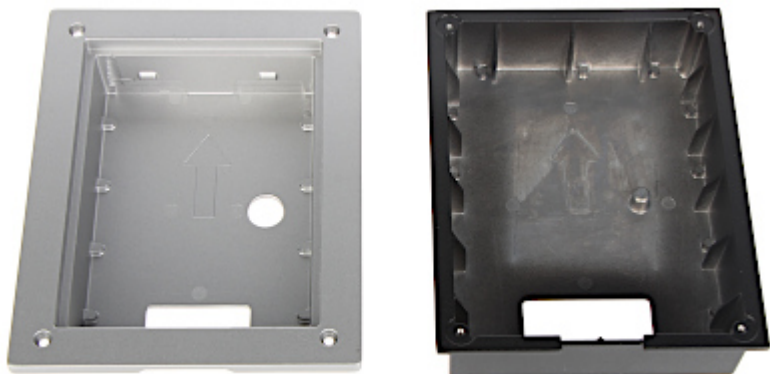

Rear view:



In the kit:

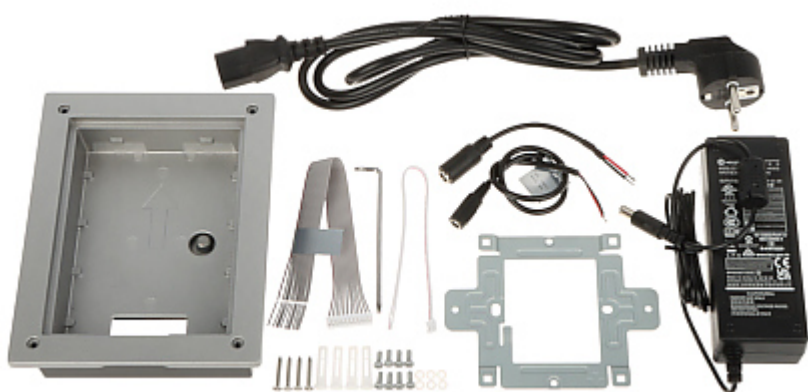

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------