

Code: VI-750/R1U

UPS VI-750/R1U 750 VA PowerWalker

Net: 190.02 EUR Gross: 233.72 EUR

The VI-750/R1U is a professional device, which providing stable power to connected sets of equipment. The device is mounted to RACK 19" cabinet.



SPECIFICATION

Nominal power:	450 W
Apparent Power:	750 VA
Input voltage:	165 ... 290 V AC
Input frequency:	45 ... 55 Hz
Output voltage:	230 V AC (Pure Sine Wave)
Output frequency:	50 Hz
Voltage adjustment:	± 10 %
Frequency adjustment:	—
Transfer time:	max. 4 ms
Charging time (recover to 90% capacity):	8 hours
Battery:	2 x 6V/9Ah
Backup time:	<ul style="list-style-type: none">• 0.4 minutes @ 100% load• 8.7 minutes @ 50% load
Number of outputs:	4 pcs IEC320 C13 socket
Management software:	PowerMaster
Protections:	<ul style="list-style-type: none">• Glass Fuse• Overvoltage• Overload protection• EPO (Emergency power off) switch
Operation state indication:	<ul style="list-style-type: none">• LCD display: operation mode, battery charging level, in/out voltage level• Sound signaling - with Mute function
Main features:	<ul style="list-style-type: none">• "Cold Start" function• Expansion slot• Battery charge and maintenance control• USB/RS-232 communication port
Application:	<ul style="list-style-type: none">• Surveillance Systems• data storage centers• network, servers, workstations• Industrial Equipment
Housing type:	RACK
Operation temp. / Relative humidity:	0 °C ... 40 °C / 0 ... 90 % (non-condensing)
Weight:	8.81 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	435 x 235 x 44 mm ; RACK 19", 1U
Manufacturer / Brand:	PowerWalker
Guarantee:	2 years

PRESENTATION


Front view:



Rear view:



Expansion slot:

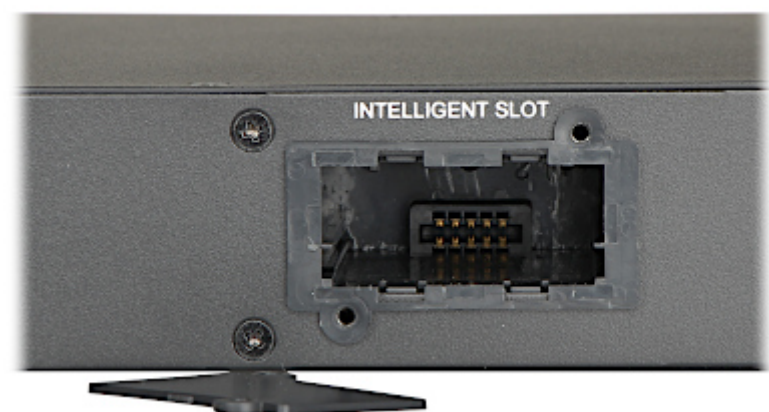

In the kit:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60