

Code: S1201A

## VIDEO DOORPHONE **S1201A** VIDOS

Net: **152.46 EUR** Gross: **187.53 EUR**



Video Doorphone is mounted in a flush-mounted housing. The S1201A is dedicated for cooperation with video doorphones and panels compatible with the VIDOS DUO digital system.

### SPECIFICATION

Compatibility:	VIDOS DUO
Sensor:	1/2.7 " Fish Eye CMOS, 2 Mpx
View angle:	170 °
IR illuminator:	—
LED illuminator:	✓
proximity reader built-in:	Standard : Unique EM 125kHz
The number of subscribers served:	1
Video output:	compatible with the VIDOS DUO digital video doorphone system
Main features:	<ul style="list-style-type: none"><li>• Wiring - 2 wires without polarity</li><li>• Relay output : 1 pcs or 2 pcs - B5 module</li><li>• Support up to 13 indoor devices (monitors / uniphones)</li><li>• PIR detectors support</li><li>• Permanent or cyclical zoom-up of the observed image</li><li>• Electric strikes and electromagnetic locks support</li><li>• Electric lock supply: 12V DC / max. 300mA</li><li>• Easy to add and delete users via MASTER key fobs</li></ul>
Power supply:	24 V DC
Power consumption:	≤ 3 W (operation) ≤ 0.8 W (Standby mode)
Housing:	Acid-proof steel / Plastic, Waterproof
Color:	Silver

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

"Index of Protection":	IP54
Operation temp:	-20 °C ... 55 °C
Weight:	0.79 kg
Dimensions:	220 x 119 x 52 mm
Manufacturer / Brand:	VIDOS
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:



Side view:




Mounting side view:



Connectors view:



In the kit:

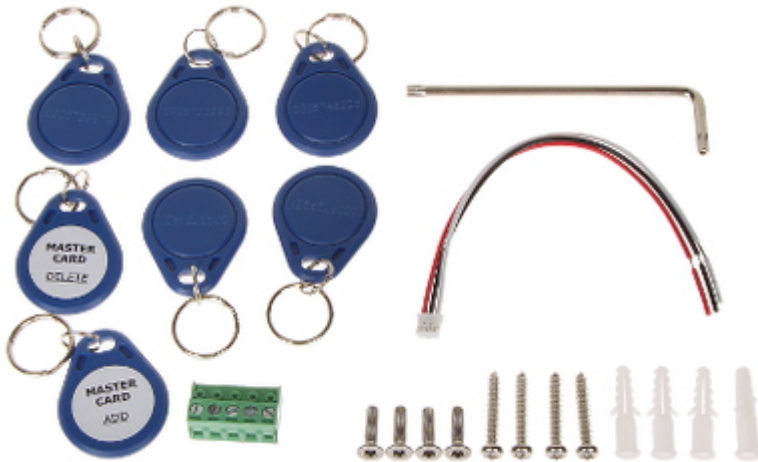

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60