

Code: S1101A

VIDEO DOORPHONE **S1101A** VIDOS

Net: **119.21 EUR** Gross: **119.21 EUR**



Video Doorphone is mounted in a surface housing. The S1101A is dedicated for cooperation with video doorphones and panels compatible with the VIDOS DUO digital system.

SPECIFICATION

Compatibility:	VIDOS DUO
Sensor:	1/2.7", 600 TVL
View angle:	105 °
IR illuminator:	—
LED illuminator:	✓
proximity reader built-in:	Standard : Unique EM 125kHz
The number of subscribers served:	1
Video output:	compatible with the VIDOS DUO digital video doorphone system
Main features:	<ul style="list-style-type: none">• Wiring - 2 wires without polarity• Relay output : 1 pcs or 2 pcs - B5 Module• Support up to 12 indoor devices (monitors / uniphones)• PIR detectors support• Permanent or cyclical zoom-up of the observed image• Electric strikes and electromagnetic locks support• Electric lock supply: 12V DC / max. 300mA• Easy to add and delete users via MASTER key fobs• Call start and lock opening indicator
Power supply:	24 V DC
Power consumption:	≤ 3 W (operation) ≤ 0.8 W (Standby mode)
Housing:	Metal, Waterproof
Color:	Silver

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

"Index of Protection":	IP54
Operation temp:	-20 °C ... 55 °C
Weight:	0.62 kg
Dimensions:	180 x 95 x 42 mm
Manufacturer / Brand:	VIDOS
Guarantee:	3 years

PRESENTATION

Front panel:



Side view:



Mounting side view:




Connectors view:





In the kit:

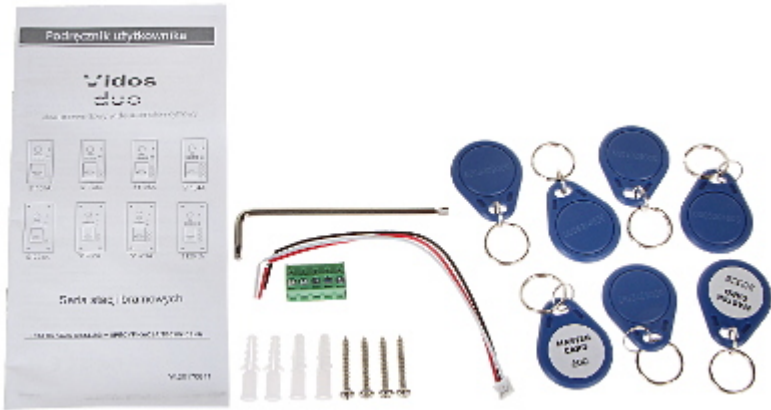

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------