

Code: S1201A-SKM

## VIDEO DOORPHONE INTEGRATED WITH MAILBOX **S1201A-SKM** VIDOS

Net: **370.63 EUR** Gross: **370.63 EUR**

Video doorphone integrated with one-way mailbox. The box is designed for mounting in a fence post or wall. Thanks to the use of the highest quality materials, it is resistant to weather conditions.

The video doorphone has been equipped with a color camera with the possibility of adjusting horizontally and vertically in the range of several degrees.

The S1201A-SKM is dedicated for cooperation with video doorphones and panels compatible with the VIDOS DUO digital system.



### SPECIFICATION

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatibility:                    | VIDOS DUO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Sensor:                           | 1/2.7 " Fish Eye CMOS, 2 Mpx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| View angle:                       | 170 °                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| IR illuminator:                   | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| LED illuminator:                  | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| proximity reader built-in:        | Standard : Unique EM 125kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Built-in keypad:                  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fingerprint reader built-in:      | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| The number of subscribers served: | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Video output:                     | compatible with the VIDOS DUO digital video doorphone system                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Main features:                    | <ul style="list-style-type: none"><li>• Integrated mailbox - Through</li><li>• Wiring - 2 wires without polarity</li><li>• Relay output : 1 pcs or 2 pcs - B5 module</li><li>• Support up to 13 indoor devices (monitors / uniphones)</li><li>• PIR detectors support</li><li>• Permanent or cyclical zoom-up of the observed image</li><li>• Electric strikes and electromagnetic locks support</li><li>• Electric lock supply: 12V DC / max. 300mA</li><li>• Easy to add and delete users via MASTER key fobs</li></ul> |
| Power supply:                     | 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Power consumption:                | ≤ 3 W (operation)<br>≤ 0.8 W (Standby mode)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Housing:                          | Acid-proof steel, Waterproof                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Color:                            | Silver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                        |                                                                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Index of Protection": | IP54                                                                                                                                                                        |
| Operation temp:        | -20 °C ... 55 °C                                                                                                                                                            |
| Weight:                | 4.45 kg                                                                                                                                                                     |
| Dimensions:            | <ul style="list-style-type: none"> <li>• Front panel : 285 x 332 mm</li> <li>• Rear panel : 260 x 112 mm</li> <li>• Adjustable depth of the box : 260 ... 410 mm</li> </ul> |
| Manufacturer / Brand:  | VIDOS                                                                                                                                                                       |
| Guarantee:             | <b>3 years</b>                                                                                                                                                              |

## PRESENTATION

Front panel:



View after removing the front panel:





Rear view:





The depth of the box is adjustable:




Front panel - view from the wall side:



Connectors description:



Dimensions:

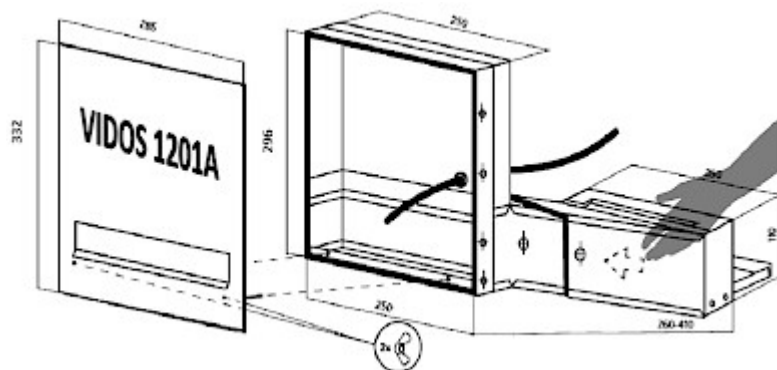

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|