

Code: DS-2CD4A26FWD-IZHS/P

IP CAMERA ANPR **DS-2CD4A26FWD-IZHS/P** - 1080p 8 ... 32 mm - **MOTOZOOM** HIKVISION

Net: **1 131.00 USD** Gross: **1 391.13 USD**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

The used motozoom lens with 8 ... 32 mm focal length allows to remote view angle adjustment. The "Darkfighter" series cameras provide a clear color image even at very poor lighting.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Operation modes:	Firmware V5.4.5, bulid: 170731 • Main stream : 1920 x 1080, 1280 x 960, 1280 x 720 • Sub stream : 704 x 576, 640 x 480, 352 x 288 • Sub stream 2 : 1920 x 1080, 1280 x 960, 1280 x 720, 704 x 576, 640 x 480, 352 x 288
Lens:	8 ... 32 mm - Motozoom
View angle:	42 ° ... 13.5 °
Range of IR illumination:	100 m
S/N ratio:	> 50 dB (AGC off)
Compression:	H.264+ / H.264 / MPEG-4 / MJPEG
Main stream frame rate:	50 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	2.4
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none"> • External microphone input • Audio output • Bi-directional audio streaming support
RS-485 interface:	—
Mobile phones support:	—
Main features:	<ul style="list-style-type: none"> • Max. speed of a moving vehicle : 120 km/h • Image analysis : License plate recognition, Gate opening, White list - Black list, License plate recognition of the coming and moving away vehicles, Export report to xls file, • Motozoom lens - Control from a Web browser • WDR - 120 dB - Wide Dynamic Range • EIS - Electronic Image Stabilization • F-DNR (Defog) - Reduction of image noise caused by precipitation • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • ICR - Movable InfraRed filter • BLC - Back Light Compensation • Video output : CVBS - BNC socket • Day/Night mode (color/b&w/auto/scheduled-switch/triggered by alarm input/triggered by video) • The "Darkfighter" series cameras provide a clear color image even at very poor lighting • The camera is equipped with a built-in heater with a thermostat
Power supply:	<ul style="list-style-type: none"> • PoE (802.3at), • 12 V DC / 1.3 A - Heater on
Power consumption:	<ul style="list-style-type: none"> ≤ 14.5 W @ 12 V DC ≤ 19.2 W @ PoE
Housing:	Compact, Metal / Plastic
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-40 °C ... 60 °C
Weight:	1.71 kg
Dimensions:	312 x 104 x 100 mm
Supported languages:	English
Manufacturer / Brand:	HIKVISION
SAP Code:	300725390
Guarantee:	3 years

PRESENTATION



Front view:



Side view:




Bottom view:




Camera connectors:



Mounting side view:

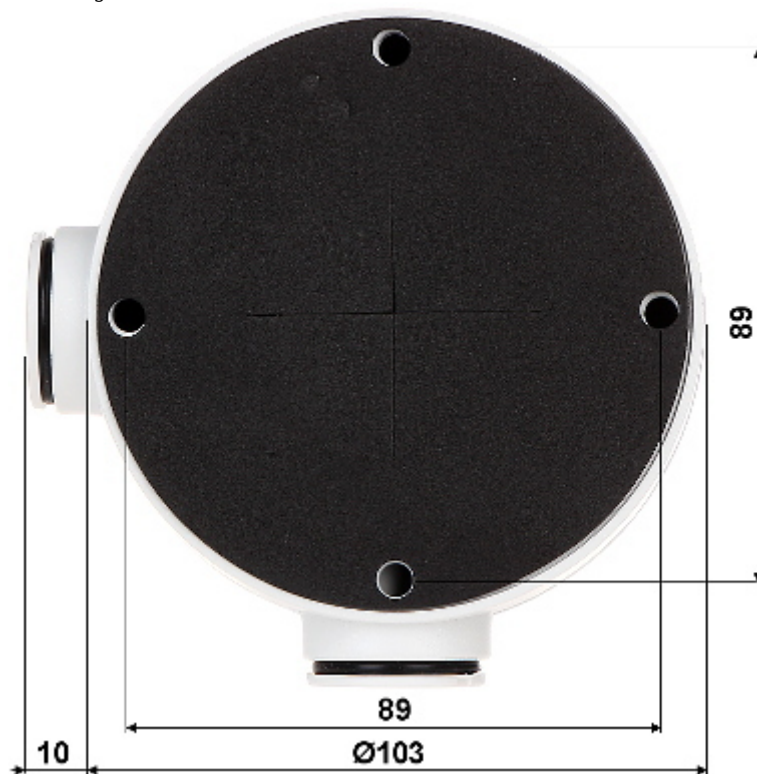

Camera dimensions:

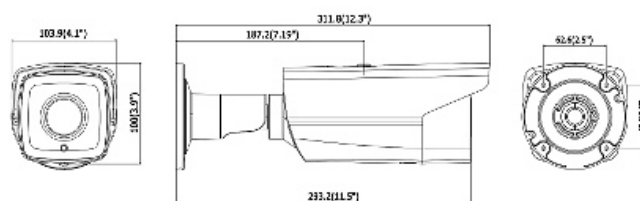

In the kit:



OUR OPINIONS



- Motozoom lens.