

Code: ITC237-PU1B-IR-WIEGAND

IP CAMERA ANPR **ITC237-PU1B-IR-WIEGAND** - 1080p 5 ... 50 mm DAHUA

Net: **3 150.00 PLN** Gross: **3 874.50 PLN**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install. The device has a Wiegand 26 interface.



SPECIFICATION

| | |
|-------------------------------|---|
| Standard: | TCP/IP |
| Sensor: | 1/2.8 " Progressive Scan CMOS |
| Matrix size: | 2.1 Mpx |
| Resolution: | 1920 x 1080 - 1080p |
| Lens: | 5 ... 50 mm - Auto Iris DC, included |
| Lens mount: | CS |
| View angle: | 50 ° ... 5.6 ° |
| Range of IR illumination: | 40 m |
| S/N ratio: | > 50 dB (AGC off) |
| Compression: | H.265 / H.264 / MJPEG |
| Main stream frame rate: | 25 fps - 1080p |
| Network interface: | 100/1000 Base-T (RJ-45) |
| Network protocols: | IPv4/IPv6, HTTP, TCP/IP, UDP, NTP, DHCP, DNS |
| WEB Server: | Built-in, NVR compliance |
| Max. number of on-line users: | 20 |
| ONVIF: | — |
| Alarm inputs / outputs: | 2 / 2 |
| Wiegand: | Wiegand 26-bit standard |
| Audio: | <ul style="list-style-type: none">• Audio input : 2 pcs Jack socket,• Audio output : 1 pcs Jack socket |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|------------------------|---|
| Memory card slot: | Micro SD memory cards up to 64GB support (possible local recording) |
| RS-485 interface: | ✓ |
| Mobile phones support: | — |
| Main features: | <ul style="list-style-type: none"> • Max. speed of a moving vehicle : 60 km/h • Detection models: based on video or induction loop • Image analysis : License plate recognition, Gate opening, White list - embedded • ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto) |
| Power supply: | PoE (802.3at) |
| Power consumption: | ≤ 17 W |
| Housing: | Metal |
| Color: | White |
| "Index of Protection": | IP66 |
| Operation temp: | -30 °C ... 60 °C |
| Weight: | 4.1 kg |
| Dimensions: | 447 x 240 x 233 mm |
| Supported languages: | English |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

PRESENTATION





Side view:




Bottom view:




Internal view of the housing:

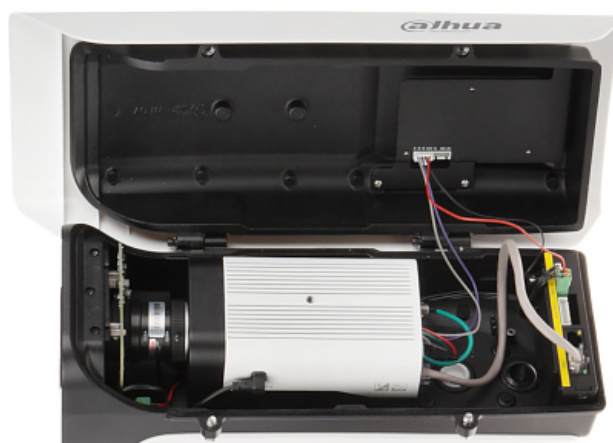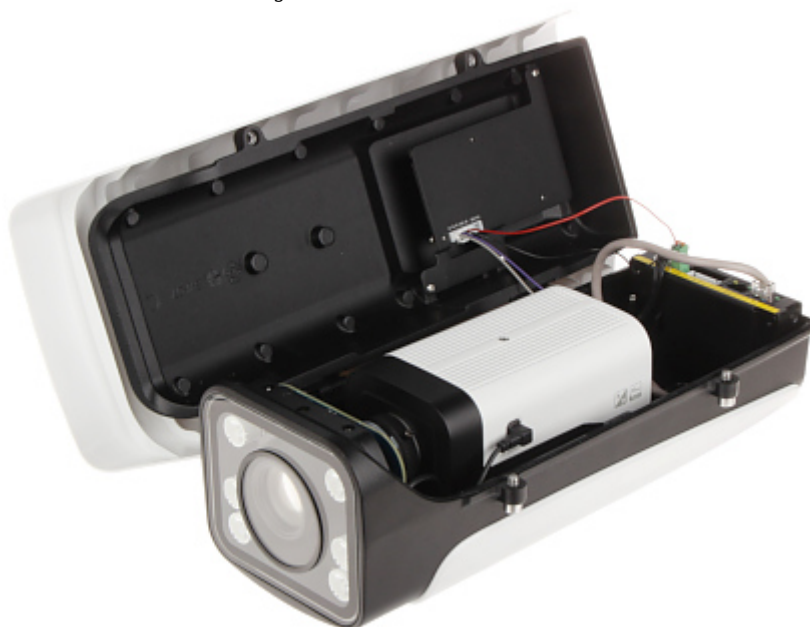

Connectors:

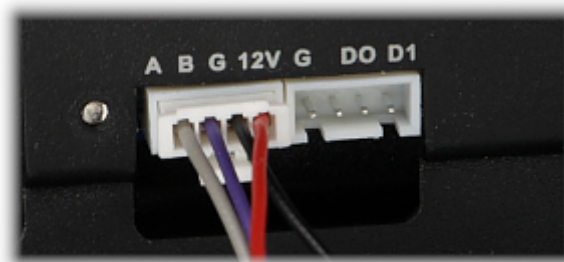

Camera connectors:

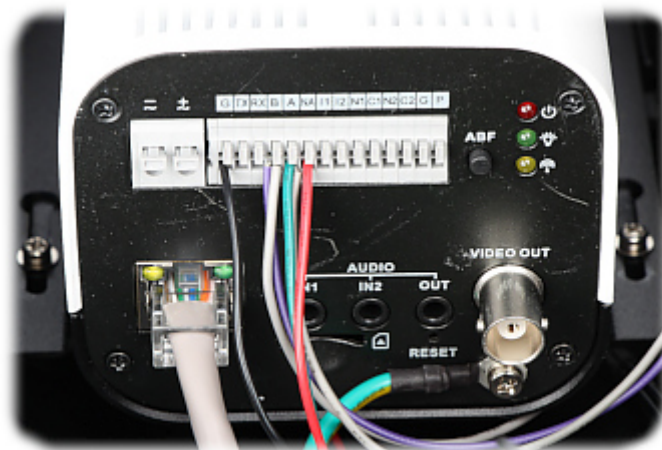

In the kit:



