

Code: DS-2CD2A25G0/P-IZS(2.8-12MM)

# IP CAMERA ANPR **DS-2CD2A25G0/P-IZS(2.8-12MM)** - 1080p 2.8 ... 12 mm - **MOTOZOOM** Hikvision

Net: **926.82 EUR** Gross: **1 139.99 EUR**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment. This is a camera from the Darkfighter series, designed for work in difficult lighting conditions.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



## SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	2.8 ... 12 mm - <b>Motozoom</b>
View angle:	103 ° ... 39 °
Range of IR illumination:	40 m
Compression:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Main stream frame rate:	50 fps - 1080p
Network interface:	10/100/1000 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, UDP, Bonjour
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	✓
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Alarm inputs / outputs:	2 / 2
Audio:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

RS-485 interface:	✓
Mobile phones support:	— Port no.: 8000 or access by a cloud (P2P) • Android: Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a> • iOS (iPhone): Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a>
Main features:	<ul style="list-style-type: none"> <li>• Image analysis : License plate recognition, Gate opening, White list - Black list, License plate recognition of the coming and moving away vehicles</li> <li>• Motozoom lens</li> <li>• WDR - 140 dB - Wide Dynamic Range</li> <li>• EIS - Electronic Image Stabilization</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• Anti-Flicker - The technology eliminates the tiring eyes flickering image effect</li> <li>• ICR - Movable InfraRed filter</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• CVBS, SPOT output</li> <li>• Day/Night mode (color/b&amp;w/auto/scheduled-switch/triggered by alarm input/triggered by video)</li> <li>• Motion Detection</li> <li>• Intelligent Image Analysis : intrusion, crossing the line (tripwire)</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• PoE (802.3at),</li> <li>• 12 V DC / 1.2 A</li> </ul>
Power consumption:	≤ 14 W
Housing:	Compact, Aluminum alloy
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK10
Operation temp:	-30 °C ... 60 °C
Weight:	2.33 kg
Dimensions:	353 x 140 x 146 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian
Manufacturer / Brand:	Hikvision
SAP Code:	311313027
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:




Side view:



Bottom view:




Mounting side view:

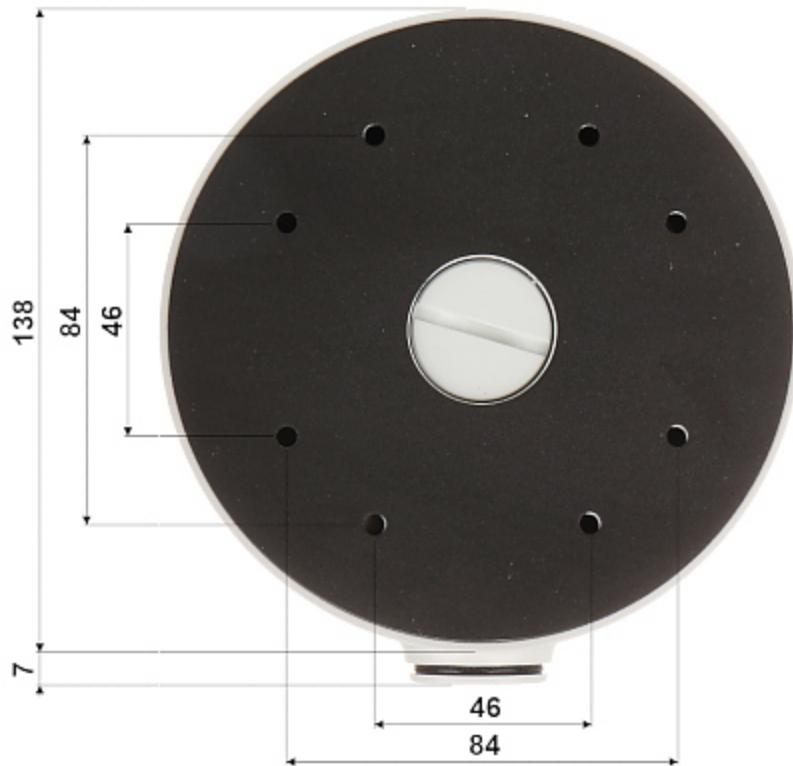

Camera connectors:



In the kit:

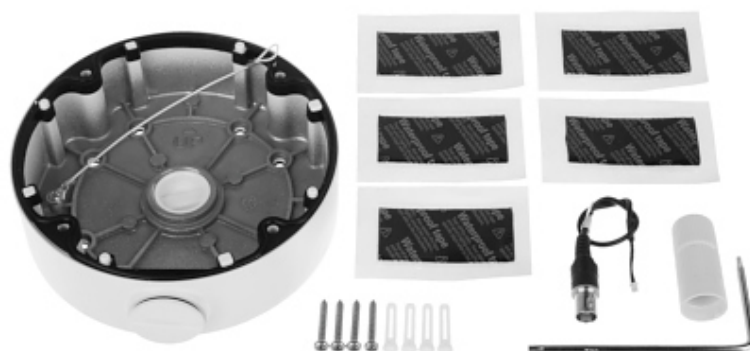



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60