

Code: ITC215-PW6M-IRLZF-B-C2

IP CAMERA ANPR **ITC215-PW6M-IRLZF-B-C2** - 1080p 3.2 ... 10.5 mm - MOTOZOOM DAHUA

Net: **1 241.35 EUR** Gross: **1 241.35 EUR**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

The used motozoom lens with 3.2 ... 10.5 mm focal length allows to remote view angle adjustment.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	3.2 ... 10.5 mm - Motozoom
View angle:	108 ° ... 30 °
Range of IR illumination:	12 m
Compression:	H.265 / H.264 / MJPEG
Main stream frame rate:	25 fps @ 1080p
Network interface:	100/1000 Base-T (RJ-45)
WEB Server:	Built-in
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
ONVIF:	✓
Alarm inputs / outputs:	3 / 3
Audio:	• External microphone input • Audio output • Bi-directional audio streaming support

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Video output:	PAL/NTSC
RS-485 interface:	2x
RS-232 interface:	1x
Mobile phones support:	—
Main features:	• Motozoom lens • WDR - 96 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Built-in LPR Deep learning engine • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • Image analysis : License plate recognition, vehicle type recognition, vehicle logo, vehicle color, recognition of the characteristics of the driver and front passenger, detection of vehicles without a license plate, overlaying the image with time, address (channel position), lane (number/direction), plate (number and color), vehicle (speed, color, type), vehicles detection max. 30 km/h • ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto) • White Balance - ATW/Manual
Power supply:	• PoE (802.3at), • 12 V DC, • 24 V AC
Power consumption:	< 20 W
Housing:	Compact, Metal + Plastic
Color:	White + Black
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-30 °C ... 65 °C
Weight:	2.38 kg (with bracket)
Dimensions:	• 297 x 125 x 108 mm (without bracket) • 487 x 186 x 125 mm (with bracket)
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Bottom view:



Memory card slot:



Bracket dimensions:

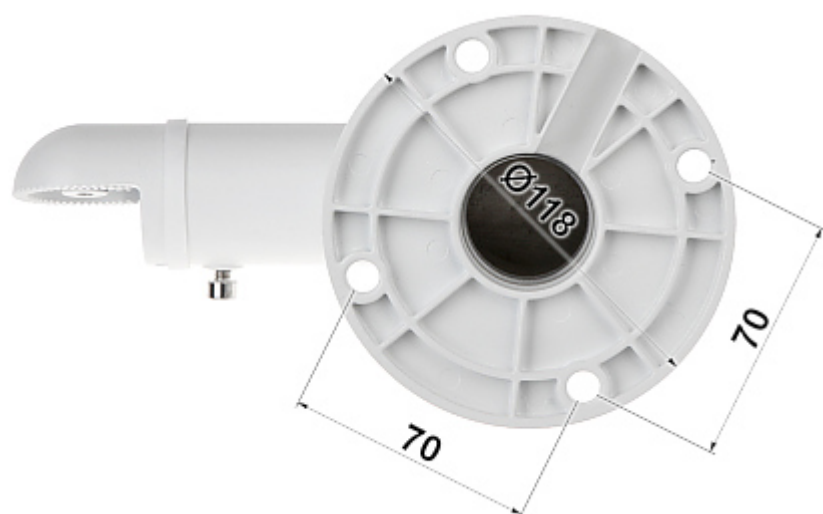


Camera connectors:



Connectors description:



Dimensions:

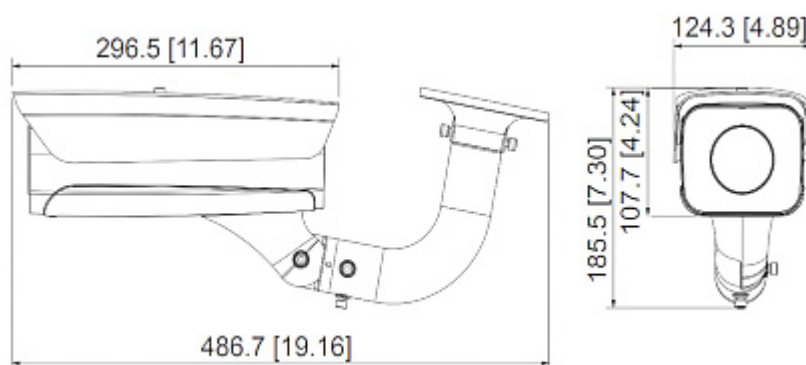

See how to initialize DAHUA cameras:

:

In the kit:



OUR OPINIONS



- o Motozoom lens.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------