

Code: BCS-P-5621RSA

IP SPEED DOME CAMERA OUTDOOR **BCS-P-5621RSA** - 1080p 4.7 ... 94 mm BCS POINT

Net: **812.99 EUR** Gross: **812.99 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan Sony CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 704 x 576 - D1
Scanning system:	Progressive
Lens:	4.7 ... 94 mm
View angle:	68 ° ... 3.9 ° (manufacturer data) 61 ° ... 3.9 ° (our tests result)
Optical zoom:	x 20
Digital zoom:	x 16
Range of IR illumination:	100 m
S/N ratio:	> 52 dB (AGC off)
Video output:	—
Preset rotation speed:	300 °/s
Rotation speed (manual control):	0.1 °/s ... 300 °/s (horizontal) 0.1 °/s ... 300 °/s (vertical)
Horizontal rotation range:	360 ° - continuous

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Vertical rotation range:	0 ° ... 90 °
RS-485 interface:	—
Number of presets:	255
Horizontal scan:	—
Route settings:	16
Image compression method:	H.264 / MJPEG
Bitrate:	• 32 ... 8192 kbps @ H.264 • 32 ... 12288 kbps @ MJPEG @
Alarm inputs / outputs:	—
Audio:	• External microphone input • Audio output • Audio detection
Main stream frame rate:	1 ... 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	L2PT, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, QoS, NTP, FTP, HTTP, SNMP
WEB Server:	Built-in, Web Viewer
Max. number of on-line users:	10
ONVIF:	2.4
Memory card slot:	Micro SD memory cards up to 64GB support (possible local recording)
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) • Android: Free application BCS Point • iOS (iPhone): Free application BCS Point
Default IP address:	DHCP
Default admin user / password:	admin / 123456
Web browser access ports:	80, 554
PC client access ports:	80
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://192.168.1.66:554/unicast/c1/s0/live - Main stream rtsp://192.168.1.66:554/unicast/c1/s1/live - Sub stream
Main features:	• D-WDR - Wide Dynamic Range • F-DNR (Defog) - Reduction of image noise caused by precipitation • EIS - Electronic Image Stabilization • DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • Configurable Privacy Zones - 8 • Motion Detection • Sharpness - sharper image outlines • Mirror - Mirror image • Day/Night mode (color/b&w/auto)
Power supply:	• 24 V AC / 3 A (power adapter included) • 24 V DC / 3 A
Power consumption:	50 W
Housing:	Speed Dome, Metal
Color:	White
Operation temp:	-40 °C ... 70 °C
"Index of Protection":	IP66



Weight:	5.37 kg (without bracket) 6.19 kg (with bracket)
Dimensions:	Ø 227 x 359 mm (without bracket)
Supported languages:	English, Polish
Manufacturer / Brand:	BCS POINT
Guarantee:	3 years

PRESENTATION

Bottom view:



Internal view of the housing:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Micro SD card slot is located inside the camera:



Camera connectors:




Connectors description:

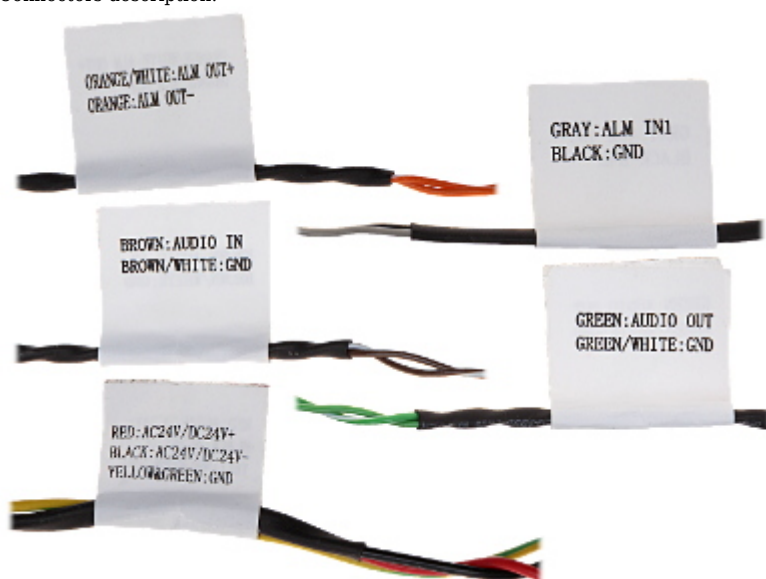

Bracket view:



Bracket dimensions:

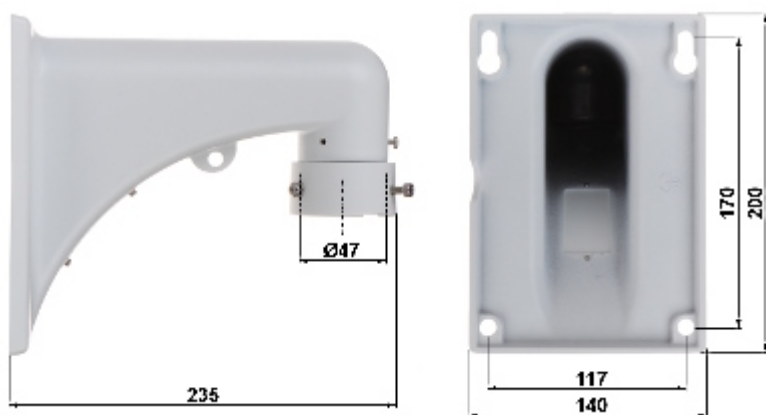

In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

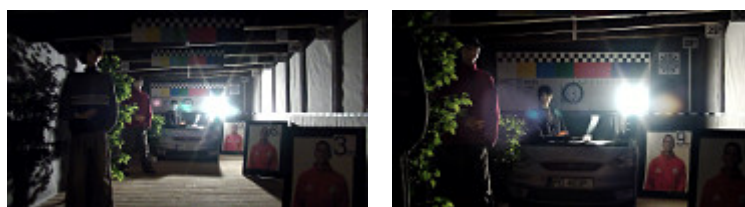

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------