

Code: IPC675LFW-AX4DUPKC-VG

IP SPEED DOME CAMERA OUTDOOR **IPC675LFW-AX4DUPKC-VG** - 5 Mpx
2.8 ... 12 mm UNIVIEW
Net: **464.85 EUR** Gross: **464.85 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera equipped with LightHunter technology, which allows you to obtain a clear color image even at night and has the function of active audio-visual deterrence in combination with AI artificial intelligence functions. Active intrusion deterrence works by blinking blue and red light and siren sound or voice prompts.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2880 x 1620 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p
Lens:	2.8 ... 12 mm
View angle:	• 104 ° ... 31 ° (manufacturer data) • 81 ° ... 30 ° (our tests result)
Optical zoom:	x 4
Digital zoom:	—
Range of IR illumination:	50 m
White light LED illuminator range:	10 m
Video output:	—
Preset rotation speed:	• 50 °/s (horizontal) • 40 °/s (vertical)
Rotation speed (manual control):	• 0.1 °/s ... 50 °/s (horizontal), • 0.1 °/s ... 40 °/s (vertical)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Horizontal rotation range:	0 ° ... 345 ° - Rotation of the head is limited by stops
Vertical rotation range:	-10 ° ... 110 °
RS-485 interface:	—
Number of presets:	256
Horizontal scan:	—
Route settings:	16
Image compression method:	Ultra H.265 / H.265 / H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	• Microphone built-in, • Speaker built-in • Bi-directional audio streaming support • Audio detection • Noise reduction
Main stream frame rate:	25 fps @ 5 Mpx
Network interface:	10/100 Base-TX (RJ-45)
Network protocols:	IPv4, IGMP, ICMP, ARP, TCP/IP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, IEEE 802.1x, SNMP, SSL
WEB Server:	Built-in
Max. number of on-line users:	32
ONVIF:	✓
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Access by a cloud (P2P) • Android: Free application EZView • iOS (iPhone): Free application EZView
Default IP address:	DHCP or 192.168.1.13
Default admin user / password:	admin / 123456
Web browser access ports:	80, 554
PC client access ports:	Port no.: 80 or access by a cloud (P2P) - PC: Free application EZStation
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://192.168.1.13:554/unicast/c1/s0/live - Main stream rtsp://192.168.1.13:554/unicast/c1/s1/live - Sub stream



Main features:	• Intelligent Object Tracking • WDR - 120 dB - Wide Dynamic Range • 2D-DNR, 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • Support ARP defence • BLC/HLC - Back Light / High Light Compensation • Day/night mode • ICR - Movable InfraRed filter • Auto White Balance • RESET button - on the cable • Privacy zones - max. 4 • Motion Detection • Tamper signaling • Image rotation and mirror • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • NAS - Network Attached Storage support - allows to connect memory resources directly to the computer network • Home Position - set the camera to the specified position if no operator activity for a specified dwell time • Active deterrence function - Active intrusion deterrence works by blinking blue and red light and siren sound or voice prompts • Intelligent Image Analysis : crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, people counting, crowd gathering estimation, face detection
Housing:	Speed Dome, Plastic
Color:	White + Black
"Index of Protection":	IP66
Vandal-proof:	—
Power supply:	• PoE (802.3af), • 12 V DC / 1.5 A
Power consumption:	≤ 18 W
Operation temp:	-20 °C ... 60 °C
Weight:	0.94 kg
Dimensions:	Ø 133 x 185 x 276 mm (without bracket)
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Slovenian, Hungarian, Italian
Manufacturer / Brand:	UNIVIEW
Guarantee:	2 years

PRESENTATION

Top view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Bottom view:




Mounting side view:



Camera connectors:



Camera dimensions:

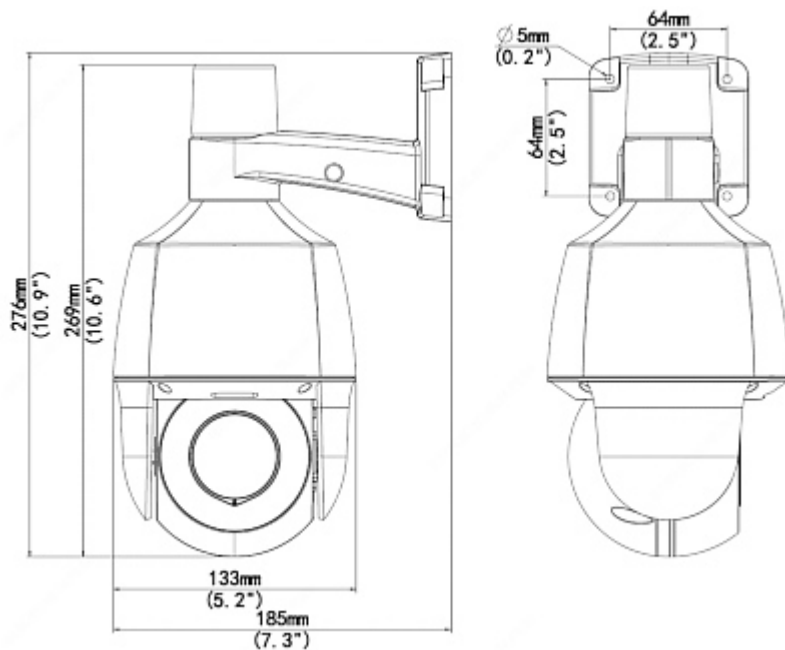


In the kit:




OUR TESTS

Camera image at artificial illumination (about 30Lux):

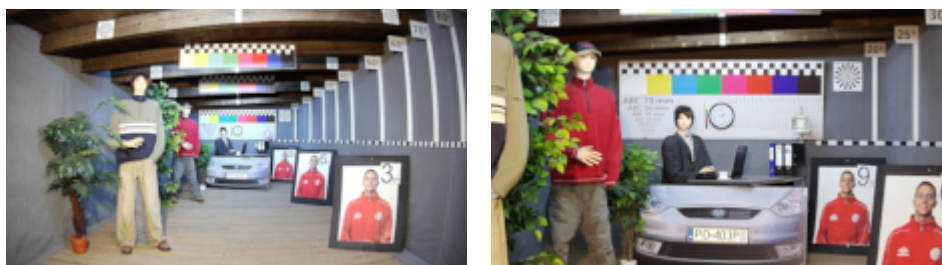


Camera image at night conditions with internal built-in LED illuminator on:

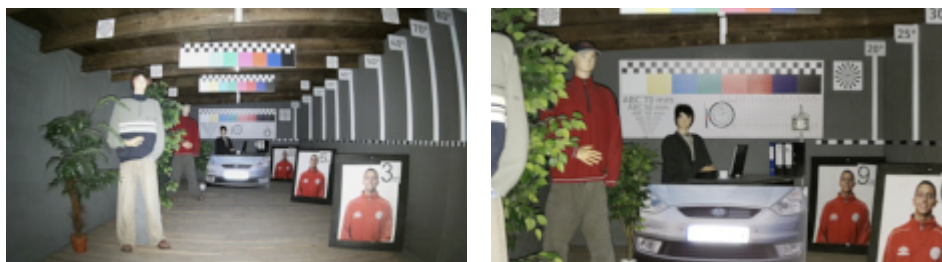

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

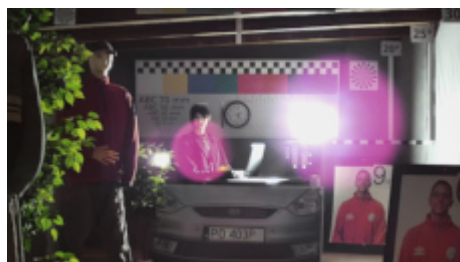

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------