

Code: LUMENA-1M1-12

IP PTZ CAMERA INDOOR **LUMENA-1M1-12** - 1.3 Mpx 2.8 mm

Net: **52.22 EUR** Gross: **52.22 EUR**

IP camera equipped with very good high resolution sensor.
Due to above it is perfect solution for surveillance systems
requiring persons or vehicles recognition.
Included camera software enables management and
integrated monitoring of many network cameras.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " OmniVision OV1035 CMOS
Digital Image Processor:	Hisilicon 3518C
Matrix size:	1.3 Mpx
Resolution:	1280 x 960 - 1.3 Mpx 1280 x 720 - 720p 640 x 480
Scanning system:	Progressive
Lens:	2.8 mm
View angle:	• 81 ° (manufacturer data) • 76 ° (our tests result)
Optical zoom:	—
Range of IR illumination:	15 m
S/N ratio:	≥ 50 dB
Video output:	—
Rotation speed (manual control):	0.1 °/s ... 12 °/s (horizontal) 0.1 °/s ... 10 °/s (vertical)
Preset rotation speed:	15 °/s
Horizontal rotation range:	355 °
Vertical rotation range:	0 ° ... 93 °
RS-485 interface:	—
Number of presets:	220

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Horizontal scan:	✓
Route settings:	3
Image compression method:	H.264
Protections:	Overvoltage
Alarm inputs / outputs:	—
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, NTP, PPPOE, UPNP
Bitrate:	256 ... 10000 kbps
ONVIF:	✓
Mobile phones support:	Connection in cloud technology only • Android: Free application Cloudlens • iOS (iPhone): Free application Cloudlens
Main features:	• ICR - Movable InfraRed filter • DNR - Digital Noise Reduction • BLC - configurable Back Light Compensation • AGC - Automatic Gain Control • Auto White Balance • Day/Night mode (color/b&w/auto)
Power supply:	12 V DC / 0.83 A (power adapter not included)
Housing:	Dome, Plastic
Color:	Ivory
Operation temp:	-15 °C ... 60 °C
"Index of Protection":	IP40
Weight:	0.420 kg
Dimensions:	Ø 137 x 112 mm
Guarantee:	2 years

PRESENTATION

Camera view after remove the Dome cover:






Mounting side view:



In the kit:

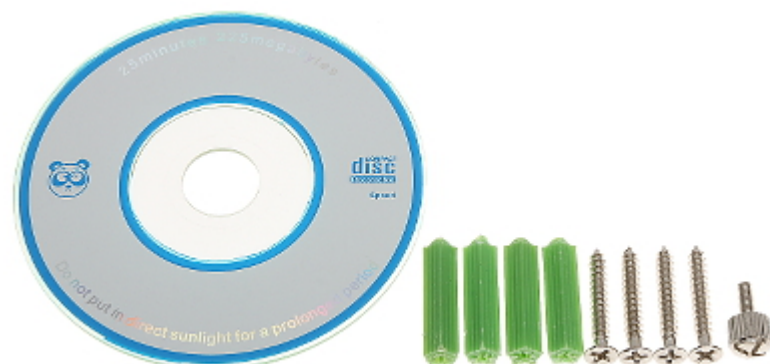

OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- No possibility of setting and start the route in the camera using the DVR. The camera routes support is available only through the camera web interface.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

