

Code: DS-2SE7C124IW-AE(32X/4)(S5)

IP SPEED DOME CAMERA OUTDOOR **DS-2SE7C124IW-AE(32X/4)(S5)**

ACUSENSE - 1080p 4.8 ... 153 mm Hikvision

Net: **1 718.63 EUR** Gross: **1 718.63 EUR**

The Speed Dome IP camera, in addition to the traditional PTZ camera module, also has a panoramic camera module mounted in the same housing. The series of these cameras can be used to monitor large spaces in high definition, such as rivers, roads, railways, airports, squares, parks, meeting places, etc.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). In addition, the camera has an audio-visual alarm function in the form of flashing white light and sound warnings generated as a result of events.

Camera from AcuSense series. PoE powering possibility, compatible with the Hi-PoE standard makes the device more universal and easier to install.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	• Camera PTZ : 1/2.8 " Progressive Scan CMOS • Camera 2 : 1/2.8 Progressive Scan CMOS
Matrix size:	• Camera PTZ : 2.1 Mpx • Camera 2 : 3.7 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx (Camera 2) , 1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	• Camera PTZ : 4.8 ... 153 mm F1.2 • Camera 2 : 4.0 mm F1.6
View angle:	• Camera PTZ : 58 ° ... 2.1 ° (manufacturer data) 58 ° ... 2.6 ° (our tests result) • Camera 2 : 79 ° (manufacturer data) 70 ° (our tests result)
Optical zoom:	x 32
Digital zoom:	x 16
Range of IR illumination:	200 m
Video output:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Preset rotation speed:	• 240 °/s (horizontal) • 200 °/s (vertical)
Rotation speed (manual control):	0.1 °/s ... 160 °/s (horizontal) 0.1 °/s ... 120 °/s (vertical)
Horizontal rotation range:	360 ° - continuous
Vertical rotation range:	-15 ° ... 90 °
RS-485 interface:	—
Number of presets:	300
Horizontal scan:	✓
Route settings:	4
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	2 / 1
Audio:	• External microphone input • Audio output • Audio detection • Speaker built-in - Alarm siren • Bi-directional audio streaming support • Digital Noise Reduction
Main stream frame rate:	• Camera PTZ : 25 fps @ 1080p • Camera 2 : 25 fps @ 3.7 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, Bonjour
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	✓
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.64
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	• Camera PTZ - Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ • Camera PTZ - Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ • Camera 2 - Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/201/ • Camera 2 - Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/202/



Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • EIS - Electronic Image Stabilization • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Day/night mode • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • Sharpness - sharper image outlines • Configurable: brightness, contrast, saturation • Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • NAS - Network Attached Storage support • Privacy zones • Motion Detection • Intelligent 3D Positioning System • Intelligent Object Tracking • Active deterrence function - Light and sound alarm • Filtering of false alarms based on the recognition of persons and vehicles • Intelligent Image Analysis : crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, advanced face capture features - detection of up to 5 faces simultaneously • The camera is equipped with a built-in heater with a thermostat
Power supply:	• Hi-PoE, • 24 V AC / 5 A (power adapter included)
Power consumption:	max. 60 W
Housing:	Speed Dome, Metal
Color:	White
Operation temp:	-30 °C ... 65 °C
"Index of Protection":	IP66
Weight:	6.2 kg
Dimensions:	Ø 220 x 373 mm (without bracket)
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	301316793
Guarantee:	3 years

PRESENTATION

Bottom view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



View after remove the cover:






Memory card slot and "Reset" button:



Camera connectors:



Connectors description:

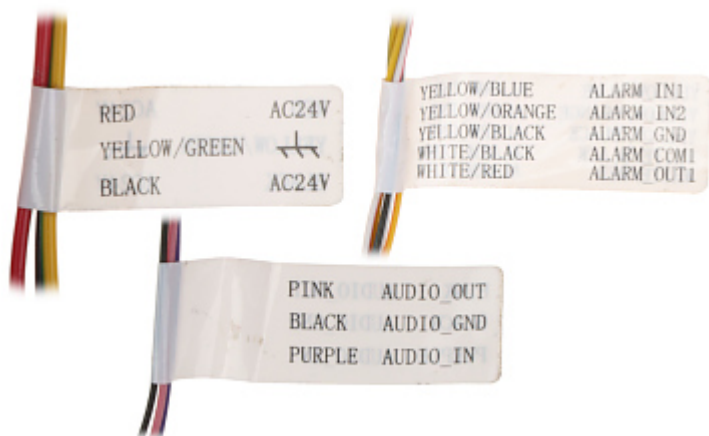

In the kit:



OUR TESTS

PTZ CAMERA:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

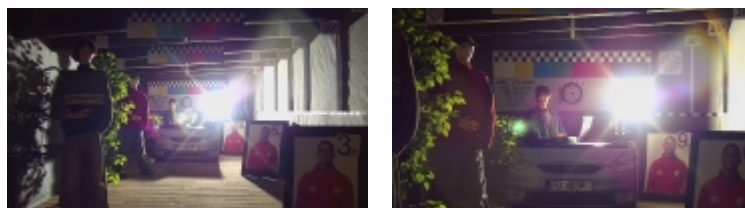

:

2 CAMERA:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------