

Code: DINB-13820

## BUFFERED SWITCHING POWER SUPPLY ADAPTER **DINB-13820**

Net: **27.98 EUR** Gross: **34.42 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

DINB-13820 is designed to mount on the DIN 35 mm rail.




### SPECIFICATION

Adapter type:	Switching
Input voltage:	90 ... 264 V AC
Output voltage:	<ul style="list-style-type: none"><li>• 11 ... 13.8 V DC (buffer operation)</li><li>• 9 ... 13.8 V DC (battery mode)</li></ul>
Max. output current (total):	2.5 A
Battery charging current:	0.5 A
Power:	35 W (max)
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload</li><li>• Reverse polarity connection</li><li>• Discharge</li></ul>
Adapter operation control:	<ul style="list-style-type: none"><li>• AC input voltage presence indication</li><li>• DC output voltage presence indication</li><li>• Battery charging indication</li></ul>
Housing type:	Plastic, DIN, TS-35 rail mounting
Weight:	0.32 kg
Dimensions:	122 x 93 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Adapter connectors:

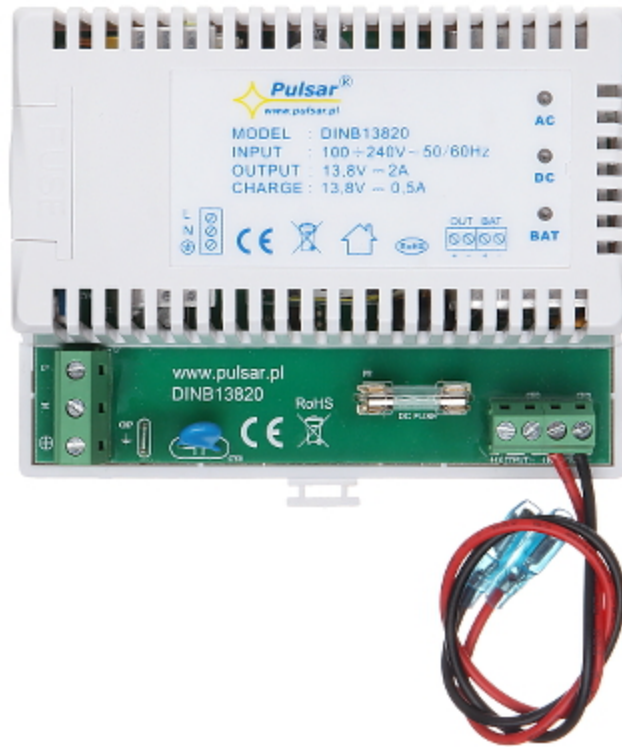

Mounting side view:



Dimensions:

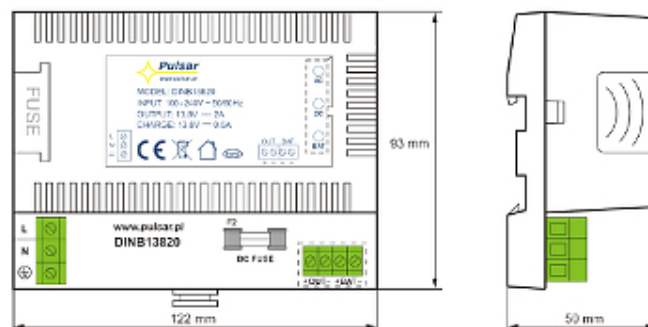



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60