

Code: DRC-100A

BUFFERED SWITCHING POWER SUPPLY ADAPTER **DRC-100A** MEAN WELL

Net: **82.06 EUR** Gross: **82.06 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.
DRC-100A is designed to mount on the DIN 35 mm rail.




SPECIFICATION

Adapter type:	Switching
Input voltage:	100 ... 240 V AC
Output voltage:	• 12 ... 15 V DC (buffer operation) • 13.8 V DC (battery mode)
Max. output current (total):	7 A
Battery charging current:	2.5 A
Power:	96.6 W (max)
Protections:	• Short-circuit • Overvoltage • Overload • Reverse polarity connection • Discharge
Adapter operation control:	• DC output voltage presence indication • Technical outputs relay type Bat. Low, AC OK
Housing type:	Plastic, DIN, TS-35 rail mounting
Weight:	0.350 kg
Dimensions:	55 x 90 x 100 mm
Manufacturer / Brand:	MEAN WELL
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front panel:

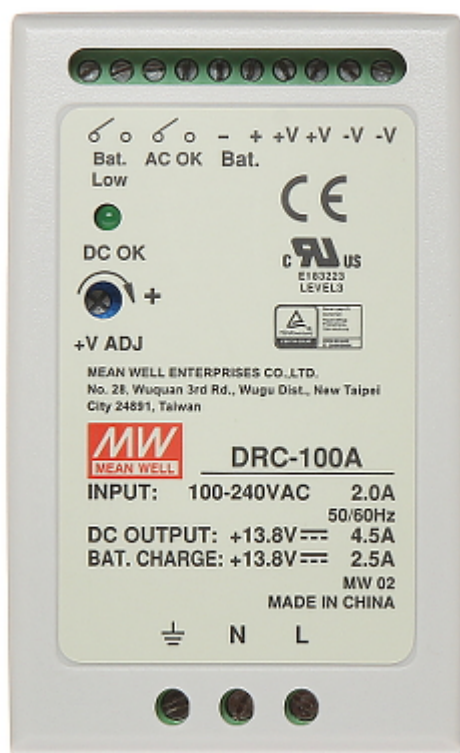


Side view:

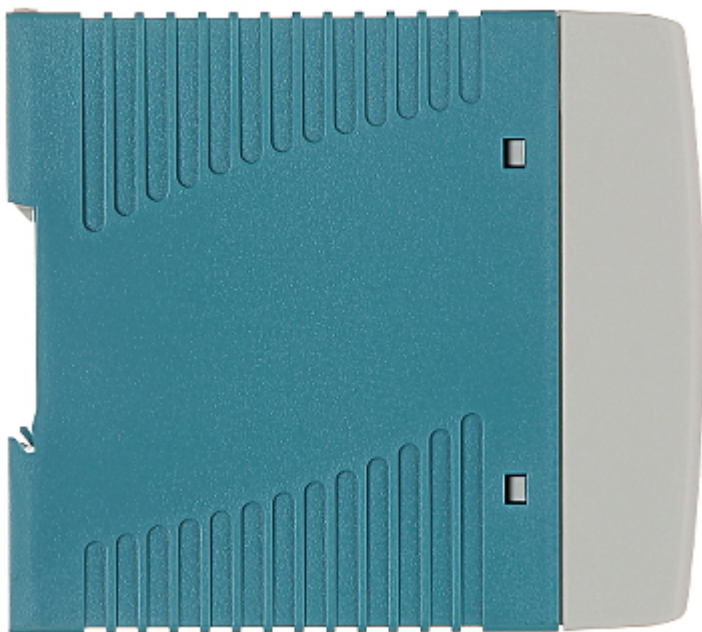

Mounting side view:

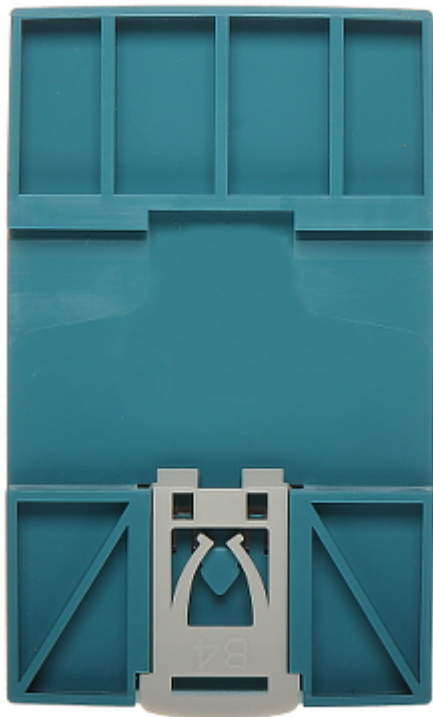

Dimensions:

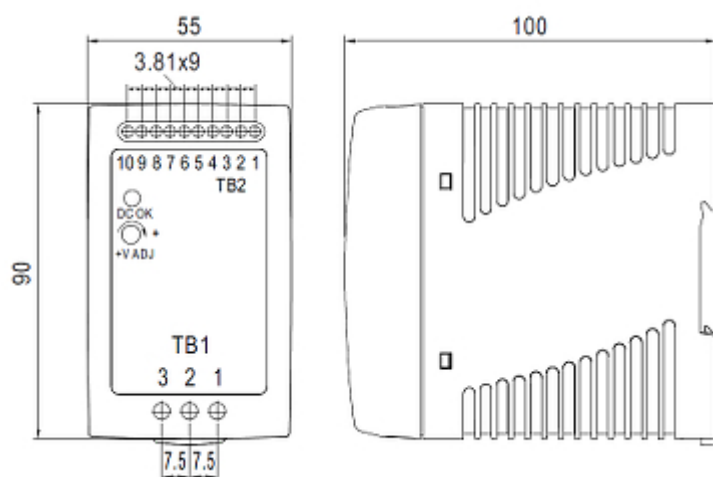

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------