

Code: HAC-HDW1500EM-A-0280B

AHD, HD-CVI, HD-TVI, PAL VANDALPROOF CAMERA **HAC-HDW1500EM-A-0280B** - 5 Mpx 2.8 mm DAHUA

Net: **70.03 EUR** Gross: **86.14 EUR**



Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	1/2.7 " CMOS
Matrix size:	5 Mpx
Resolution:	2592 x 1944 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 960 x 576 - 960H, PAL
Range of IR illumination:	50 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none">• 98 ° (manufacturer data)• 94 ° (our tests result)
S/N ratio:	> 65 dB
Video output:	AHD / HD-CVI / HD-TVI / PAL - 1 Vpp / 75 Ω
Audio:	<ul style="list-style-type: none">• Microphone built-in,• Audio support via coaxial cable - HD-CVI only


Main features:	<ul style="list-style-type: none"> • D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Sharpness - sharper image outlines • AGC - Automatic Gain Control • Privacy zones • Mirror - Mirror image • Auto White Balance
OSD menu:	OSD menu available via DAHUA recorder
Power supply:	12 V DC / 260 mA
Power consumption:	≤ 4.2 W
Housing:	Dome, Aluminum
Color:	White
Vandal-proof:	✓
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.41 kg
Dimensions:	Ø 106 x 94 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera is out from clamping ring:



Mounting side view:

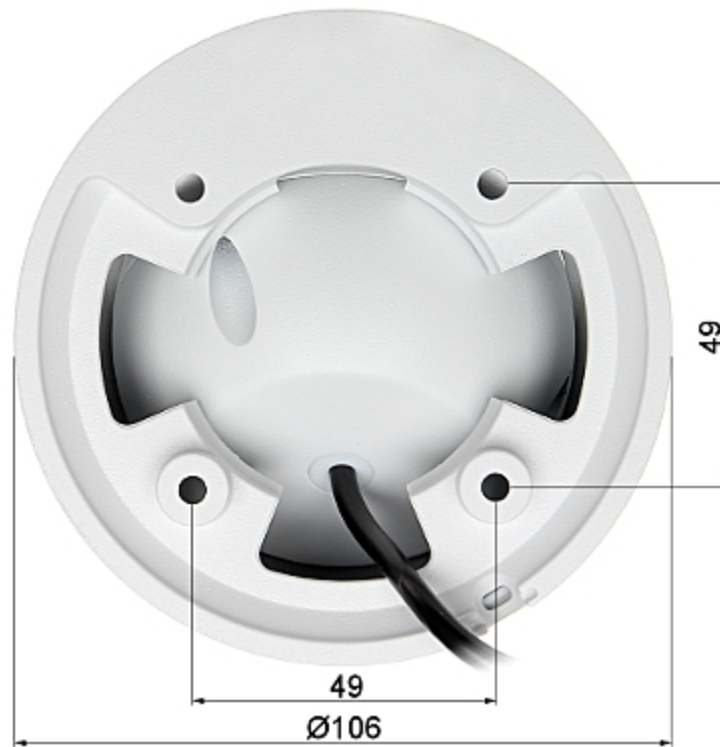

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60