

Code: HAC-HDW1800TL-A-0280B

AHD, HD-CVI, HD-TVI, PAL CAMERA **HAC-HDW1800TL-A-0280B** - 8.3 Mpx 2.8 mm DAHUA

Net: **93.98 EUR** Gross: **93.98 EUR**

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). Camera is according to IP67 Index of Protection norm.




SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, CVBS
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	8.3 Mpx
Resolution:	3840 x 2160 - 8.3 Mpx @ HD-CVI @ 25 fps , 3840 x 2160 - 8.3 Mpx @ HD-CVI / HD-TVI / AHD @ 15 fps , 2592 x 1944 - 5 Mpx @ HD-CVI @ 20 fps , 2560 x 1440 - 3.7 Mpx @ HD-CVI @ 25 fps , 960 x 576 - 960H @ PAL @ 25 fps
Lens:	2.8 mm
View angle:	• 105 ° (manufacturer data) • 101 ° (our tests result)
Range of IR illumination:	30 m
IR illuminator power adjustment:	Automatic
Video output:	AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω
Audio:	Microphone built-in, HD-CVI only
OSD menu:	✓

Main features:	• D-WDR • 2D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Sharpness - sharper image outlines • AGC - Automatic Gain Control • Privacy zones • Mirror - Mirror image • Auto White Balance
Power supply:	12 V DC / 360 mA
Power consumption:	≤ 4.3 W
Housing:	Dome, Metal + Plastic
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-40 °C ... 60 °C
Weight:	0.25 kg
Dimensions:	Ø 97 x 86 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Camera is out from clamping ring:

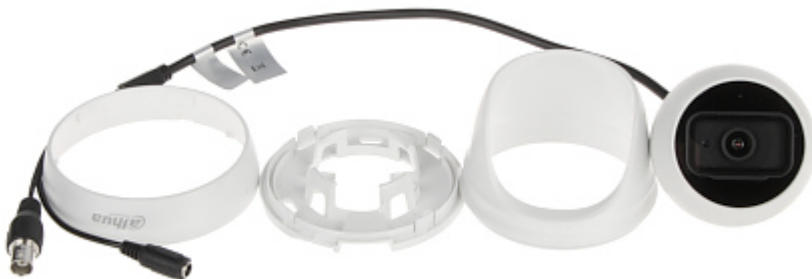

Dimensions:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

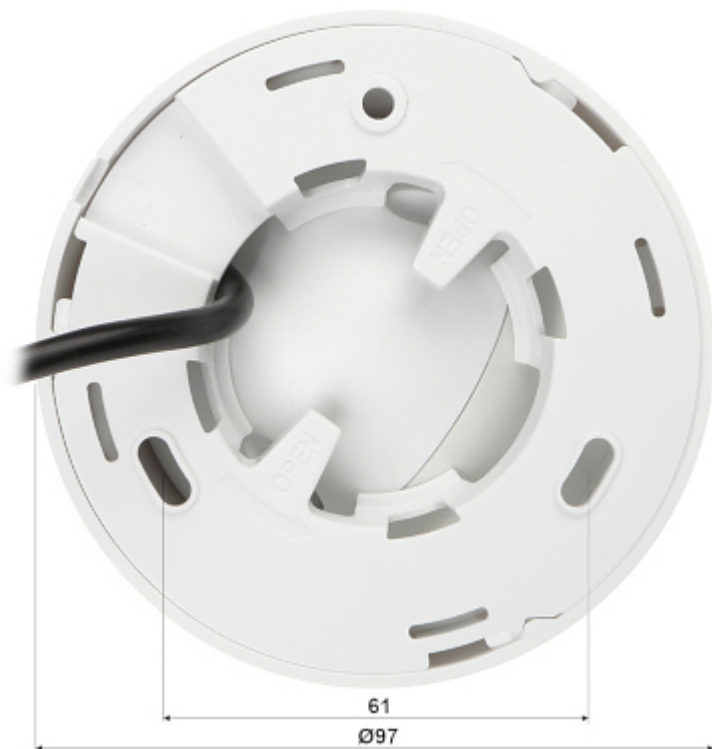

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------