

Code: HAC-HDBW1500R-Z-2712-S2

AHD, HD-CVI, HD-TVI, PAL VANDALPROOF CAMERA **HAC-HDBW1500R-Z-2712-S2** - 5 Mpx 2.7 ... 12 mm - MOTOZOOM DAHUA
Net: **138.03 EUR** Gross: **138.03 EUR**

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

The used motozoom lens with 2.7 ... 12 mm focal length allows to remote view angle adjustment.



SPECIFICATION

Standard:	AHD / HD-CVI / HD-TVI / CVBS
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2880 x 1620 - 5 Mpx @ 25 fps - HD-CVI only : Aspect Ratio 16 : 9 , 2560 x 1440 - 3.7 Mpx @ 25 fps , 1920 x 1080 - 1080p @ 25 fps - HD-CVI only , 960 x 576 - 960H, PAL
Lens:	2.7 ... 12 mm - Motozoom - The camera does not have auto-focus function
View angle:	• 107 ° ... 34 ° (manufacturer data) • 102 ° ... 35 ° @ HD-CVI (our tests result) • 88 ° ... 30 ° @ AHD / HD-TVI (our tests result)
S/N ratio:	> 65 dB
Range of IR illumination:	30 m
IR illuminator power adjustment:	Automatic
Video output:	AHD / HD-CVI / HD-TVI / PAL - 1 Vpp / 75 Ω
Audio:	—

Main features:	• D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • Day/night mode • Auto White Balance • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • Privacy zones - max. 8 • Mirror - Mirror image
OSD menu:	OSD menu available via DAHUA recorder
Power supply:	12 V DC / 460 mA
Power consumption:	≤ 5.5 W
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK10
Operation temp:	-30 °C ... 60 °C
Weight:	0.44 kg
Dimensions:	Ø 122 x 89 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:




Camera connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:

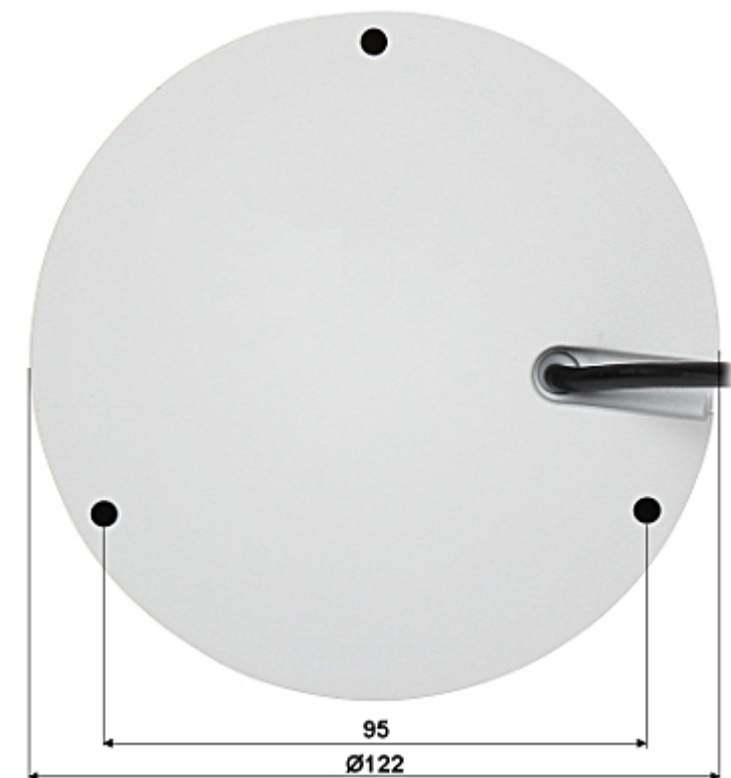

In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

AHD:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

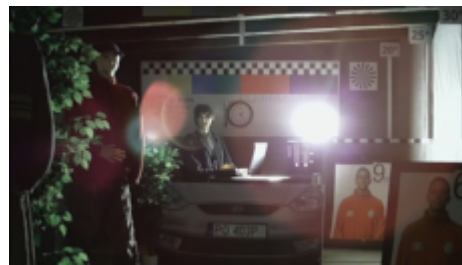

HD-CVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

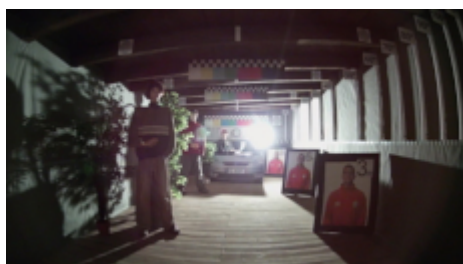

HD-TVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

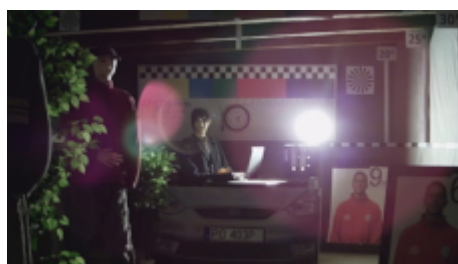

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------