

Code: BCS-EA48VWR6-G(2)

AHD, HD-CVI, HD-TVI, PAL CAMERA **BCS-EA48VWR6-G(2)** - 8 Mpx, 4K UHD
2.7 ... 13.5 mm - MOTOZOOM
Net: **129.48 EUR** Gross: **129.48 EUR**

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.



SPECIFICATION

Standard:	AHD / HD-CVI / HD-TVI / CVBS
Resolution:	3840 x 2160 - 8 Mpx, 4K UHD @ AHD / HD-TVI / HD-CVI, 15 fps , 2880 x 1620 - 5 Mpx @ AHD / HD-TVI / HD-CVI, 25 fps , 2560 x 1440 - 4 Mpx @ AHD / HD-TVI / HD-CVI, 30 fps / 25 fps , 1920 x 1080 - 1080p @ AHD / HD-TVI / HD-CVI, 30 fps / 25 fps , 960 x 576 - 960H @ CVBS
Sensor:	1/2.7 " CMOS
Lens:	2.7 ... 13.5 mm - Motozoom
View angle:	114 ° ... 32 °
Range of IR illumination:	60 m
Video output:	AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω
Audio:	✓
OSD menu:	✓
Main features:	• WDR - 120 dB - Wide Dynamic Range • Auto White Balance • F-DNR (Defog) - Reduction of image noise caused by precipitation • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Day/night mode • ICR - Movable InfraRed filter
Power supply:	12 V DC / 670 mA
Power consumption:	< 8 W
Housing:	Dome, Metal

Color:	Graphite
"Index of Protection":	IP67
Mechanical protection class:	—
Operation temp:	-30 °C ... 60 °C
Weight:	0.600 kg
Dimensions:	Ø 122 x 105 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS UNIVERSAL
Guarantee:	3 years

PRESENTATION


Camera is out from clamping ring:



Dimensions:



Configuration switches:

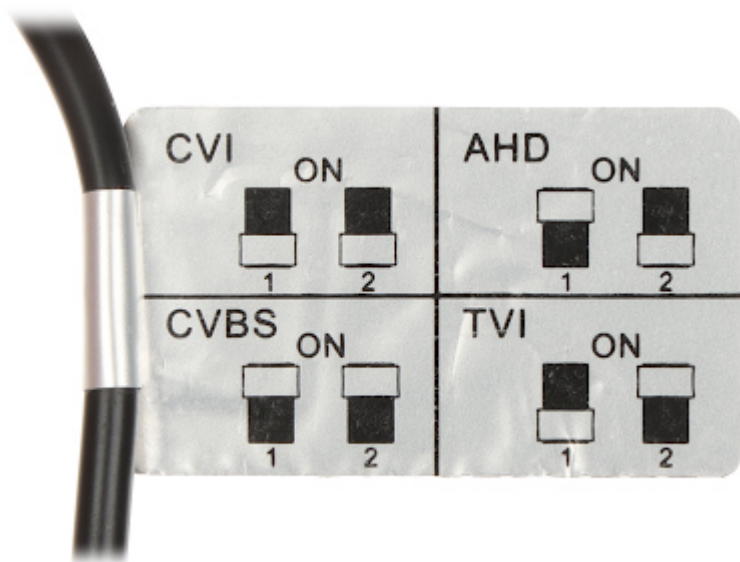

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60