

Code: ATE-CAM-IPC735

## IP MOBILE CAMERA **ATE-CAM-IPC735** - 1080p 2.8 mm AUTONE

Net: **49.52 EUR** Gross: **60.91 EUR**

Mobile IP camera equipped with M12, 6-pin - code A connector, providing image in maximum resolution Full HD, 1080p.



### SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " SC2235 CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none"><li>• 95 ° (manufacturer data)</li><li>• 90 ° (our tests result)</li></ul>
Range of IR illumination:	10 m
S/N ratio:	≥ 58 dB
RS-485 interface:	—
Memory card slot:	—
Image compression method:	H.264
ONVIF:	✓
Alarm inputs / outputs:	—
Audio:	—
Main stream frame rate:	20 fps @ 1080p
Network interface:	10/100 Base-T - M12, 6-pin socket - Code A

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> <li>• Motion Detection</li> <li>• Auto White Balance</li> <li>• AGC - Automatic Gain Control</li> <li>• BLC - Back Light Compensation</li> </ul>
Power supply:	12 V DC / 600 mA
Power consumption:	≤ 5 W
Mobile phones support:	—
Default IP address:	192.168.1.2
Default user password:	admin / -
Web browser access ports:	8899
PC client access ports:	8899
Housing:	Dome, Metal
Color:	Black
"Index of Protection":	IP67
Operation temp:	-20 °C ... 60 °C
Weight:	0.27 kg
Dimensions:	90 x 77 x 65 mm
Supported languages:	English
Manufacturer / Brand:	AUTONE
Guarantee:	2 years

## PRESENTATION

Front view - small sizes camera:




Side view:



The camera has a removable cover:



Camera mounting dimensions:

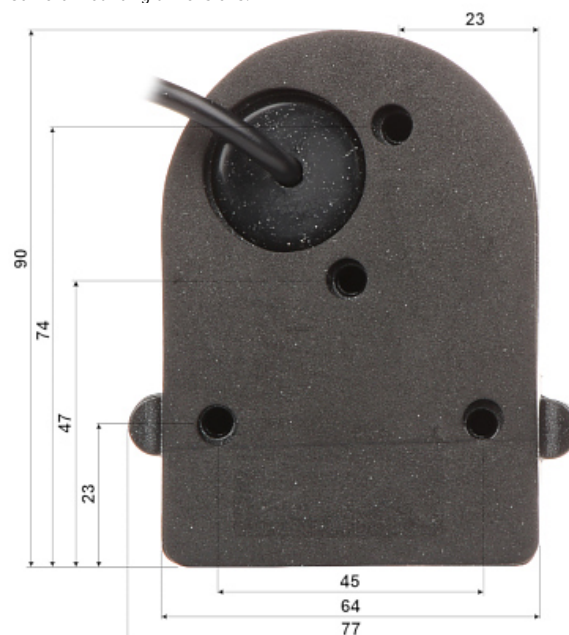

In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

