

Code: ATE-N0401EF-T2

## IP MOBILE DVR **ATE-N0401EF-T2** 4 CHANNELS AUTONE

Net: **563.34 EUR** Gross: **692.91 EUR**

The ATE-N0401EF-T2 is a recorder designed for mobile applications, e.g. in buses, city buses, trams or fleet vehicles.

### Device features:

- Recording of the traveled route of the vehicle using the GPS receiver.
- Access to live view, recordings and saved paths through a dedicated server.
- Free account on the producer's server.
- The CMSV6 server application for Windows (free license for 10 devices).
- The ability to copy recordings from the device to your own server via the Wi-Fi interface.

The device has been designed to be resistant to vibrations and shocks. Data can be saved to 2 SD cards or 2.5" hard disk.

The power cords are connected to the car system in the same way as a standard radio receiver. Connecting the "behind the ignition" line enables the use of the automatic start function of the recorder.

The device has a battery backup that allows recording for 10 seconds after switching off the engine.



### SPECIFICATION

Video inputs:	4 pcs Ethernet + PoE - M12, 6-pin socket
Video outputs:	<ul style="list-style-type: none"><li>• 1 pcs HDMI</li><li>• 1 pcs VGA</li><li>• 1 pcs Video, CVBS : M12, 6-pin socket - CINCH, on the cable</li></ul>
Resolution of recording video files:	max. 1920 x 1080 - 1080p
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	1 pcs 2.5 " - 2 TB SATA
Max. capacity of memory card:	2 x 128 GB SD/SDHC
GPS:	✓
SIM socket:	mini SIM
Wi-Fi module:	✓
RS-485:	✓
Alarm inputs / outputs:	8 / 1
Power supply:	8 V ... 36 V DC
Main features:	<ul style="list-style-type: none"><li>• Powering the cameras with 12V DC voltage directly from recorder - M12 connector</li><li>• Alarms and maintenance events registration</li><li>• Motion Detection</li><li>• Auto recording after power on</li><li>• Firmware upgrade via USB port</li><li>• 3G / 4G support</li><li>• Recording of the traveled route of the vehicle using the GPS receiver</li><li>• Access to live view, recordings and saved paths through a dedicated server</li><li>• Free account on the producer's server</li><li>• The CMSV6 server application for Windows (free license for 10 devices)</li><li>• The ability to copy recordings from the device to your own server via the Wi-Fi interface</li></ul>
Vibration resistance:	✓
Operation temp:	-20 °C ... 70 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Permissible relative humidity:	10 % ... 95 % RH
Weight:	1.1 kg
Dimensions:	185 x 149 x 58 mm
Manufacturer / Brand:	AUTONE
Guarantee:	2 years

## PRESENTATION

Front view:



View after open the front cover:

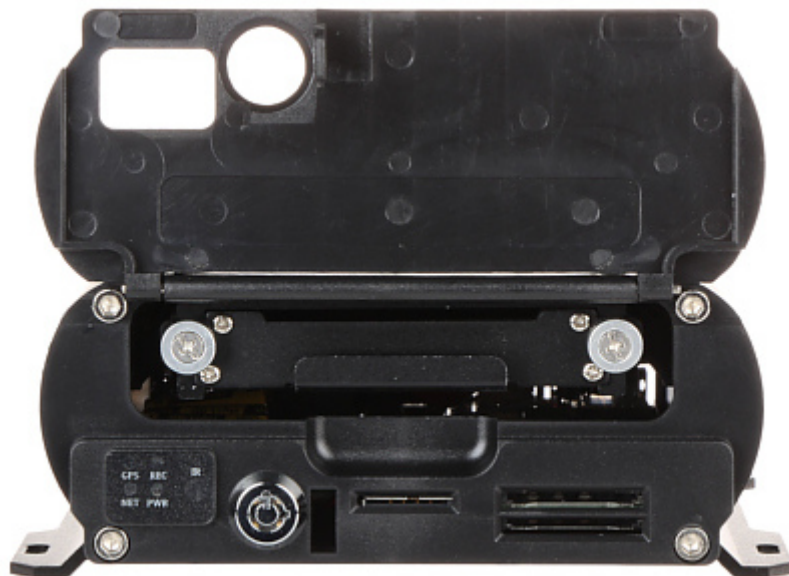

The device is equipped with SATA 2.5" HDD mobile rack:



Rear view:



In the kit:



## OUR OPINIONS



- Solid workmanship.
- Small dimensions of the device.