

Code: ATE-N0401EF-T2

IP MOBILE DVR **ATE-N0401EF-T2** 4 CHANNELS AUTONE

Net: **2 494.40 PLN** Gross: **3 068.11 PLN**

The ATE-N0401EF-T2 is a recorder designed for mobile applications, e.g. in buses, city buses, trams or fleet vehicles.

Device features:

- Recording of the traveled route of the vehicle using the GPS receiver.
- Access to live view, recordings and saved paths through a dedicated server.
- Free account on the producer's server.
- The CMSV6 server application for Windows (free license for 10 devices).
- The ability to copy recordings from the device to your own server via the Wi-Fi interface.

The device has been designed to be resistant to vibrations and shocks. Data can be saved to 2 SD cards or 2.5" hard disk.

The power cords are connected to the car system in the same way as a standard radio receiver. Connecting the "behind the ignition" line enables the use of the automatic start function of the recorder.

The device has a battery backup that allows recording for 10 seconds after switching off the engine.



SPECIFICATION

Video inputs:	4 pcs Ethernet + PoE - M12, 6-pin socket
Video outputs:	<ul style="list-style-type: none">• 1 pcs HDMI• 1 pcs VGA• 1 pcs Video, CVBS : M12, 6-pin socket - CINCH, on the cable
Resolution of recording video files:	max. 1920 x 1080 - 1080p
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	1 pcs 2.5 " - 2 TB SATA
Max. capacity of memory card:	2 x 128 GB SD/SDHC
GPS:	✓
SIM socket:	mini SIM
Wi-Fi module:	✓
RS-485:	✓
Alarm inputs / outputs:	8 / 1
Power supply:	8 V ... 36 V DC
Main features:	<ul style="list-style-type: none">• Powering the cameras with 12V DC voltage directly from recorder - M12 connector• Alarms and maintenance events registration• Motion Detection• Auto recording after power on• Firmware upgrade via USB port• 3G / 4G support• Recording of the traveled route of the vehicle using the GPS receiver• Access to live view, recordings and saved paths through a dedicated server• Free account on the producer's server• The CMSV6 server application for Windows (free license for 10 devices)• The ability to copy recordings from the device to your own server via the Wi-Fi interface
Vibration resistance:	✓
Operation temp:	-20 °C ... 70 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Permissible relative humidity:	10 % ... 95 % RH
Weight:	1.1 kg
Dimensions:	185 x 149 x 58 mm
Manufacturer / Brand:	AUTONE
Guarantee:	2 years

PRESENTATION

Front view:



View after open the front cover:

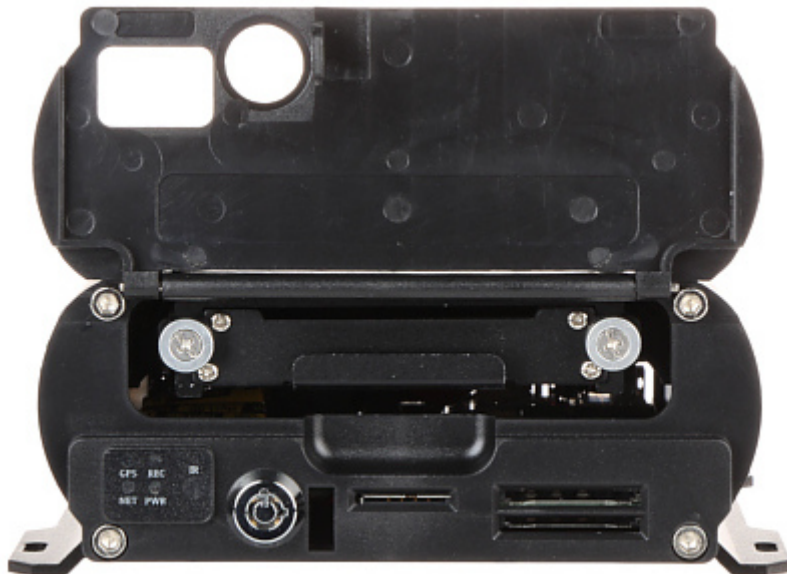

The device is equipped with SATA 2.5" HDD mobile rack:



Rear view:



In the kit:



OUR OPINIONS



- Solid workmanship.
- Small dimensions of the device.