

Code: ATE-D0401EF-T2

## AHD MOBILE DVR **ATE-D0401EF-T2** 4 CHANNELS AUTONE

Net: **496.73 EUR** Gross: **496.73 EUR**

The ATE-D0401EF-T2 is a recorder designed for mobile applications, e.g. in buses, city buses, trams or fleet vehicles.

Device features:

- Recording of the traveled route of the vehicle using the GPS receiver.
- Access to live view, recordings and saved paths through a dedicated server.
- Free account on the producer's server.
- The CMSV6 server application for Windows (free license for 10 devices).
- The ability to copy recordings from the device to your own server via the Wi-Fi interface.

The device has been designed to be resistant to vibrations and shocks. Data can be saved to 2 SD cards or 2.5" hard disk.

The power cords are connected to the car system in the same way as a standard radio receiver. Connecting the "behind the ignition" line enables the use of the automatic start function of the recorder.

The device has a battery backup that allows recording for 10 seconds after switching off the engine.



### SPECIFICATION

|                                      |                                                                                                                                                        |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                            | AHD                                                                                                                                                    |
| Video inputs:                        | 4 pcs M12, 4-pin plug, Code A                                                                                                                          |
| Video outputs:                       | <ul style="list-style-type: none"><li>• 1 pcs HDMI</li><li>• 1 pcs VGA</li><li>• 1 pcs Video, CVBS : M12, 6-pin socket - CINCH, on the cable</li></ul> |
| Resolution of recording video files: | 1920 x 1080 @ 25 fps ,<br>1280 x 720 @ 25 fps ,<br>720 x 576 @ 25 fps                                                                                  |
| Max. capacity of memory card:        | 2 x 128 GB SD/SDHC                                                                                                                                     |
| Supported hard drives:               | 1 pcs 2.5 " - 2 TB SATA                                                                                                                                |
| Image compression method:            | H.264                                                                                                                                                  |
| GPS:                                 | ✓                                                                                                                                                      |
| Wi-Fi:                               | ✓                                                                                                                                                      |
| 3G/4G:                               | ✓                                                                                                                                                      |
| SIM socket:                          | mini SIM                                                                                                                                               |
| RS-485:                              | ✓                                                                                                                                                      |
| Alarm inputs / outputs:              | 8 / 1                                                                                                                                                  |
| Power supply:                        | 8 V ... 36 V DC                                                                                                                                        |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main features:        | <ul style="list-style-type: none"> <li>• Powering the cameras with 12V DC voltage directly from recorder - M12 connector</li> <li>• Alarms and maintenance events registration</li> <li>• Motion Detection</li> <li>• Auto recording after power on</li> <li>• Firmware upgrade via USB port</li> <li>• 3G / 4G support</li> <li>• Recording of the traveled route of the vehicle using the GPS receiver</li> <li>• Access to live view, recordings and saved paths through a dedicated server</li> <li>• Free account on the producer's server</li> <li>• The CMSV6 server application for Windows (free license for 10 devices)</li> <li>• The ability to copy recordings from the device to your own server via the Wi-Fi interface</li> </ul> |
| Operation temp:       | -20 °C ... 70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Weight:               | 1.08 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Dimensions:           | 183 x 149 x 59 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Manufacturer / Brand: | AUTONE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Guarantee:            | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## PRESENTATION

View after open the front cover:




Front view:



View after open the front cover:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

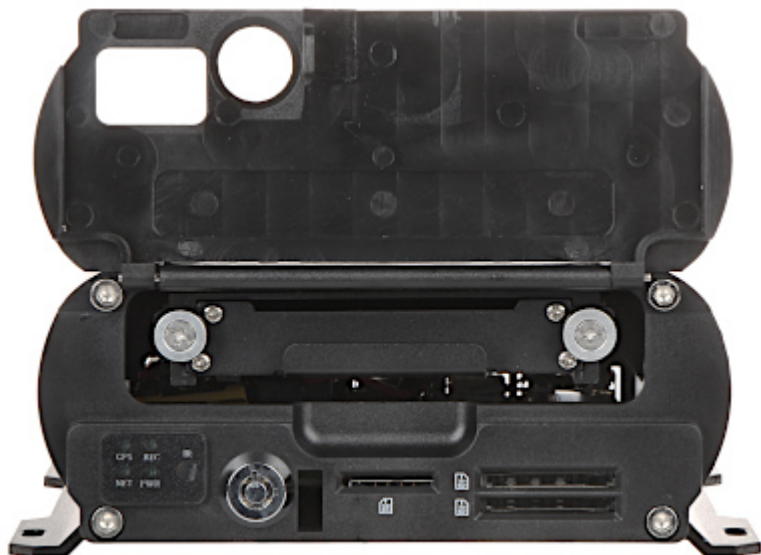

Rear view:



M12 connector:

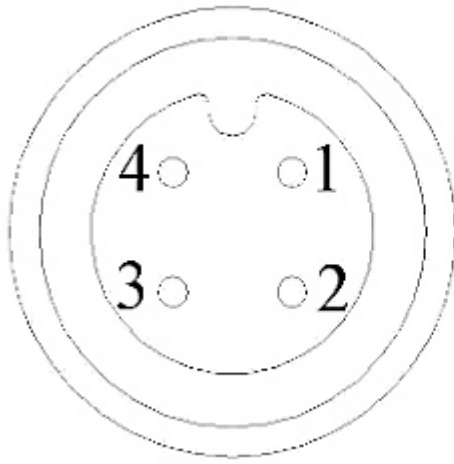

| SN | Function                  |
|----|---------------------------|
| 1  | 12V camera external power |
| 2  | GND                       |
| 3  | Audio                     |
| 4  | Video                     |

In the kit:



## OUR OPINIONS



- Solid workmanship.
- Small dimensions of the device.

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|