

Code: VTO2202F-P

VIDEO DOORPHONE **VTO2202F-P** DAHUA

Net: 1 350.00 PLN Gross: 1 660.50 PLN



Attention! When selecting 2-wire devices, check the compatibility list available at the bottom of the page in the "files" section.

SPECIFICATION

Sensor:	2 Mpx CMOS
Lens:	1.95 mm
View angle:	160 °
proximity reader built-in:	—
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
UTP category:	UTP cat. 5e
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Main features:	<ul style="list-style-type: none">• Micro SD memory cards up to 64GB support (possible local recording),• Doorbell button,• LED diodes,• Monitoring the status of individual doors,• D-WDR - Wide Dynamic Range,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Tamper detection - removing from mounting surface,• Power output 12 V DC / 100 mA

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC, • 2-Wire IP interface
Power consumption:	≤ 12 W
Housing:	Aluminum
Color:	Silver
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
IK rating:	IK07
Operation temp:	-30 °C ... 60 °C
Weight:	0.32 kg
Dimensions:	130 x 96 x 28.5 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:




Rear view:





Connectors:

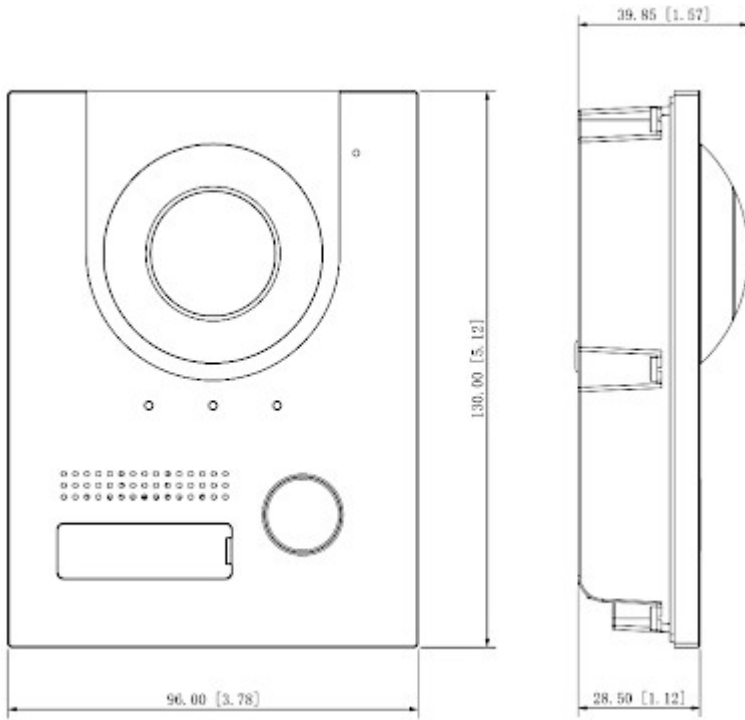

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

