

Code: VT03211D-P2

## VIDEO DOORPHONE VT03211D-P2 DAHUA

Net: 246.24 EUR Gross: 302.88 EUR



The device works with video doorphones, and other DAHUA panels. Video Doorphone is mounted in a surface housing. The device generates a separate QR code for each room (for each VTH panel), which allows connection from the smartphone via the P2P network. ATTENTION! The device does not support the Dahua analogue system.

### SPECIFICATION

Compatibility:	DAHUA
Sensor:	1/2.8", 2 Mpx CMOS
View angle:	140 °
Image compression method:	H.264
IR illuminator:	<input checked="" type="checkbox"/>
proximity reader built-in:	Access control cards - Mifare S50
The number of subscribers served:	2
UTP category:	UTP cat. 5e
Main features:	<ul style="list-style-type: none"><li>• It can only work with the mobile application, without the VTH monitor</li><li>• The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - opening the enclosure,</li><li>• Vandal-proof front panel,</li><li>• Output for the additional lock release button</li></ul>
Power supply:	<ul style="list-style-type: none"><li>• PoE (802.3af),</li><li>• 12 V DC / 580 mA</li></ul>
Power consumption:	≤ 7 W
Housing:	Aluminum - powder painted, Waterproof
Color:	Graphite

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

"Index of Protection":	IP65
Mechanical strength:	IK08
Operation temp:	-40 °C ... 60 °C
Weight:	0.47 kg
Dimensions:	182 x 101 x 31 mm
Supported languages:	English, Bulgarian, Czech, Finnish, Polish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:



Side view:



Rear view:




Connectors view:




View after open the front cover:



Dimensions:

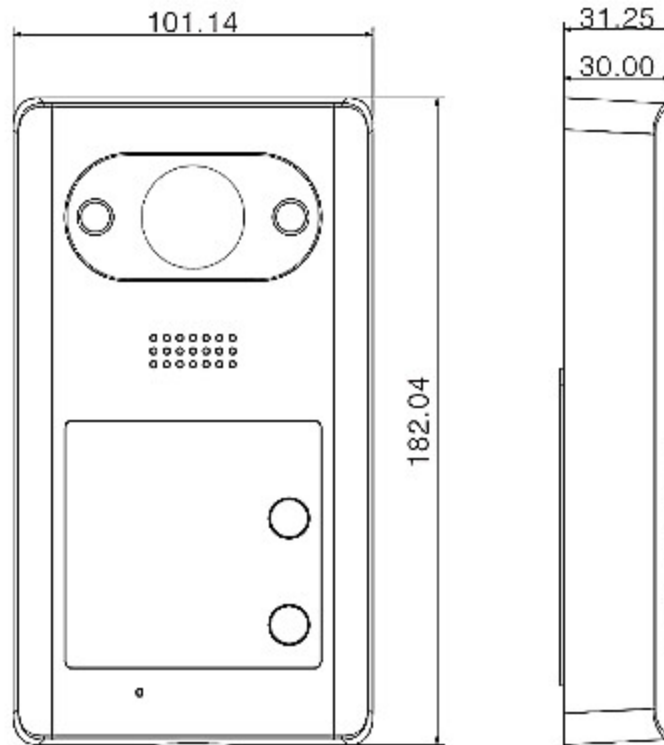

Connection schematic diagram:

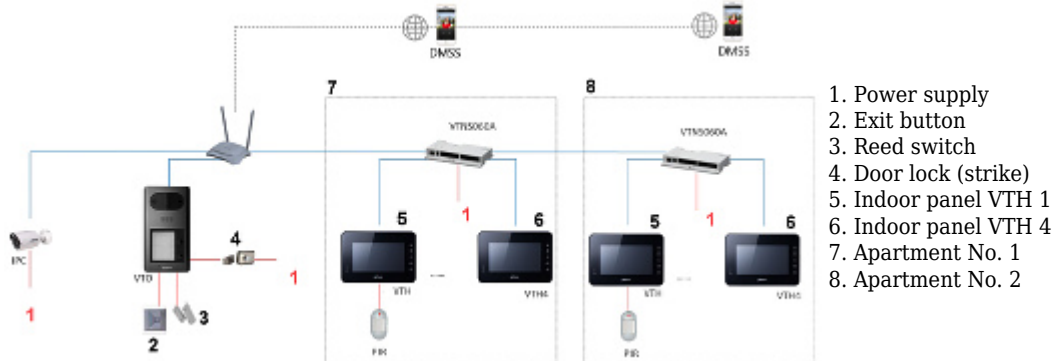

In the kit:

