

Code: VTO2101E-P

VIDEO DOORPHONE VTO2101E-P DAHUA

Net: 857.00 PLN Gross: 1 054.11 PLN



The device cooperates with video doorphones, and other panels working in DAHUA IP / SIP standard. The doorphone requires a SIP server, but it can be a SIP server for itself. After setting up the SIP server, the P2P option is available in the www panel. The use of a special firmware version in the VTH monitors is required.

ATTENTION! The device does not support the Dahua analogue system.

SPECIFICATION

Compatibility:	SIP
Sensor:	1/2.7", 2.1 Mpx CMOS
Lens:	2.8 mm
View angle:	100 °
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
UTP category:	UTP cat. 5e
Main features:	<ul style="list-style-type: none">• It can only work with the mobile application, without the VTH monitor• The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH1 / VTH2 / VTH5 indoor panel• Doorbell button,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Tamper detection - removing from mounting surface• RS-485 interface• Alarm inputs - 1 pcs
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application gDMSS Plus• iOS (iPhone): Free application iDMSS Plus There are also other versions of mobile applications: gDMSS Plus, iDMSS Plus
Power supply:	<ul style="list-style-type: none">• PoE (802.3af),• 12 V DC / 580 mA, - DAHUA

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power consumption:	≤ 7 W (operation) ≤ 2.5 W (Standby mode)
Supported languages:	English
Housing:	Metal, Waterproof - IK10
Color:	Graphite
"Index of Protection":	IP65
Operation temp:	-40 °C ... 60 °C
Weight:	0.67 kg
Dimensions:	73 x 163 x 54.5 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



Side view:



Rear view:



Particular elements:



Connectors:






Device test:

:

Dimensions:

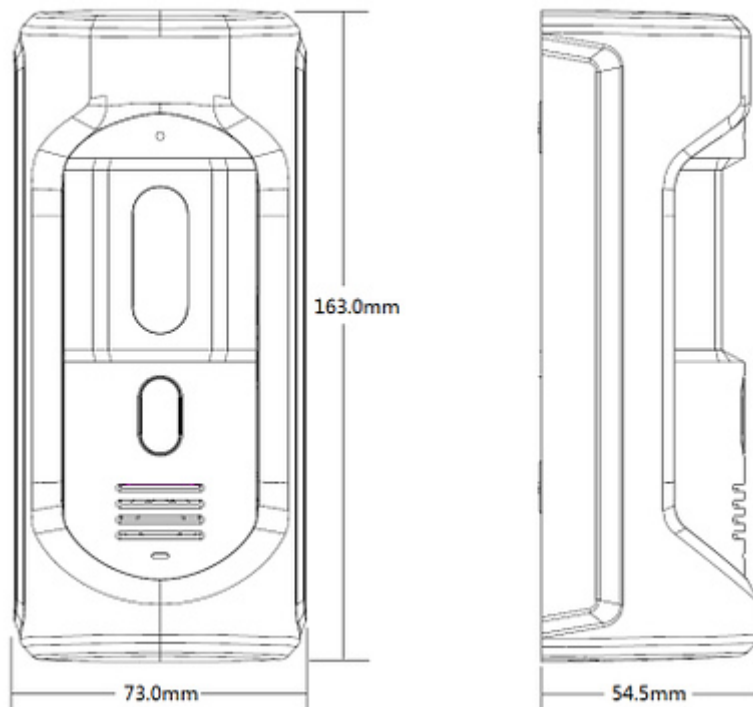

In the kit:

