

Code: VTO4202F-P

VIDEO DOORPHONE VTO4202F-P DAHUA

Net: 235.97 EUR Gross: 290.24 EUR



The module is designed for installation in DAHUA VTM12x series housings.

Attention! It is a hybrid module - it can work in 2-Wire installation as a multi-family video doorphone or as a standard IP.

SPECIFICATION

Sensor:	2 Mpx CMOS
Lens:	1.95 mm
View angle:	160 °
proximity reader built-in:	—
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
UTP category:	UTP cat. 5e
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application gDMSS Plus or DMSS • iOS (iPhone): Free application iDMSS Plus or DMSS
Main features:	<ul style="list-style-type: none">• Camera position adjustment in all planes,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Tamper detection - removing from mounting surface ,
Power supply:	<ul style="list-style-type: none">• PoE (802.3af),• 12 V DC,• 2-Wire IP interface

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power consumption:	≤ 12 W
Housing:	Aluminum
Color:	Silver
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
IK rating:	IK07
Operation temp:	-20 °C ... 60 °C
Weight:	0.28 kg
Dimensions:	100 x 100 x 49.3 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:






Rear view:




Connectors:



Dimensions:

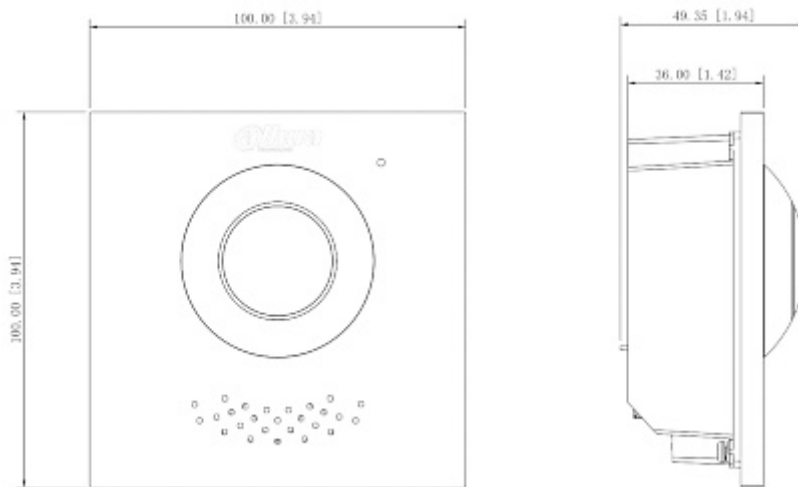

In the kit:

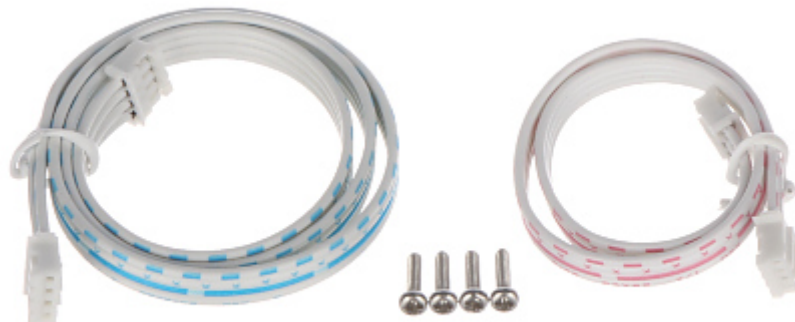



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60