

Code: DS-KH2220

INDOOR PANEL **DS-KH2220** Hikvision

Net: **93.31 EUR** Gross: **93.31 EUR**

The DS-KH2220 is designed to cooperation with video doorphones and panels working in analog HIKVISION system.
ATTENTION! The device does not support the HIKVISION IP system.



SPECIFICATION

Compatibility:	compatible with HIKVISION analog video door-phone system
Shield:	7 " TFT-LCD color matrix
Resolution:	800 x 480
Main features:	• Plug & Play, • Ultra-flat hands-free monitor, with speakerphone, • Smooth volume control, • Microphone built-in, • Speakers built-in, • Bidirectional communication ,
Power supply:	12 V DC
Max. current:	420 mA
Power consumption:	≤ 5 W
Operation temp:	-10 °C ... 55 °C
Weight:	0.278 kg
Dimensions:	196 x 133 x 18 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305300673
Guarantee:	3 years

PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:




Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Do not connect the power wire of the four-core cable to the V1/V2 pin (video wire) or A1/A2 pin (audio wire) of the four-wire interface.

B1+	V1	A1	G	B2+	V2	A2	G	CAM	G
B1+	V1	A1	G	B2+	V2	A2	G	+12V	G

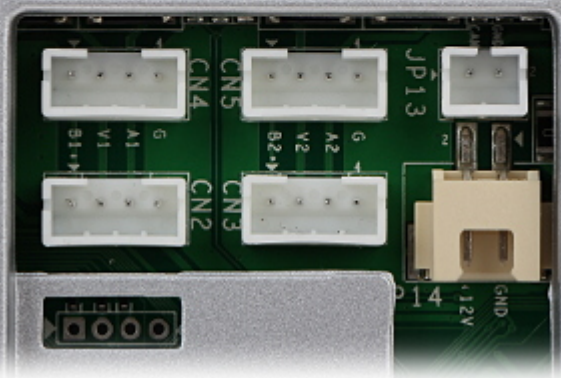

Volume adjustment:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------