

Code: DS-KIS203T

VIDEO DOORPHONE KIT **DS-KIS203T** Hikvision

Net: **121.73 EUR** Gross: **121.73 EUR**

Video Doorphone set of the Hikvision brand with a door station mounted in a surface housing and a 7" colored screen. The DS-KIS203T doesn't need any additional configuration (after connecting according to the diagram the device is ready to operate).

ATTENTION! The device does not support the HIKVISION IP system.



SPECIFICATION

DOOR STATION:	
Sensor:	1/2.7 " CMOS
IR illuminator:	✓
proximity reader built-in:	—
Video output:	1 Vpp, CVBS - pair of wires compatible with HIKVISION analog video door-phone system
Operation temp:	-10 °C ... 55 °C
Power supply:	12 V DC
Power consumption:	≤ 5 W (operation)
Main features:	• Relay output • 4-wire cable installation (included)
Housing:	Aluminum
Color:	Graphite
"Index of Protection":	IP65
Weight:	0.471 kg
Dimensions:	145 x 49 x 27 mm
INDOOR PANEL:	
Shield:	7 " TFT-LCD color matrix
Resolution:	800 x 480

Main features:	• Plug & Play, • Ultra-flat hands-free monitor, with speakerphone, • Microphone built-in, • Speakers built-in, • Bidirectional communication
Power supply:	12 V DC
Max. current:	420 mA
Power consumption:	≤ 5 W
Operation temp:	-10 °C ... 55 °C
Weight:	0.278 kg
Dimensions:	196 x 133 x 18 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305302866
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:
Front view:



Front panel:



Mounting side view:




Connectors:



Connectors description:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

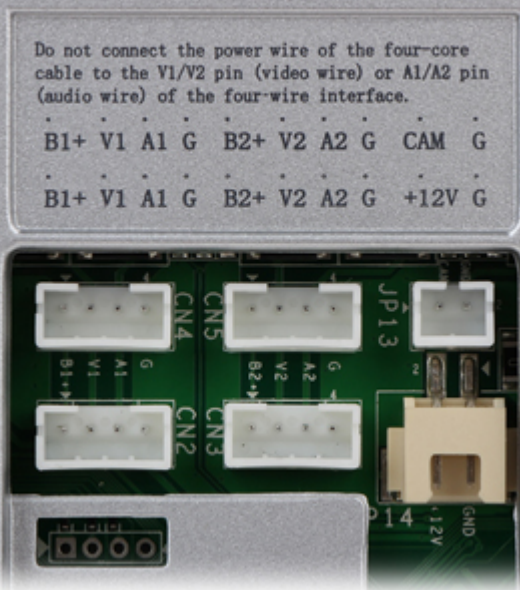

Volume adjustment:



Door station:

Front panel:



Mounting side view:






Connectors description:



In the kit:

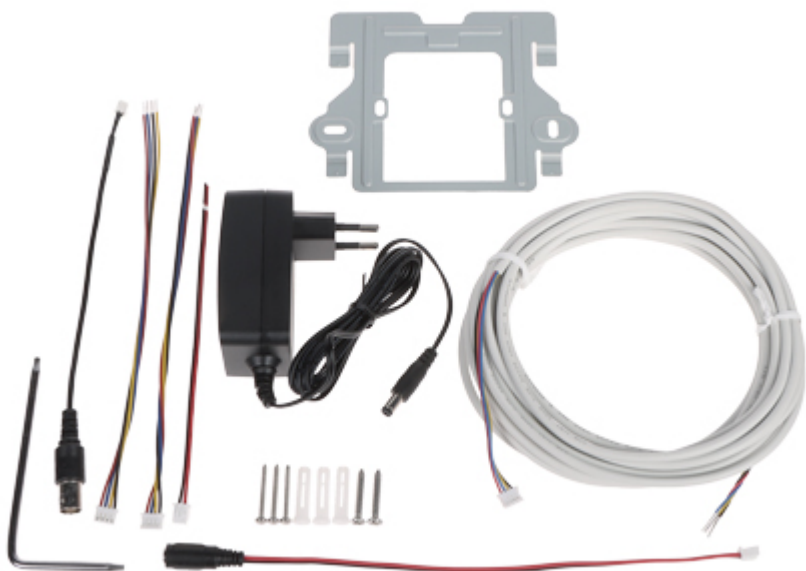

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------