

Code: DS-KV8102-IM

VIDEO DOORPHONE **DS-KV8102-IM** Hikvision

Net: **228.54 EUR** Gross: **228.54 EUR**



The device is dedicated to work with Hikvision I generation indoor panels.

SPECIFICATION

Sensor:	1.3 Mpx CMOS
LED illuminator:	—
IR illuminator:	✓
Compatibility:	Hikvision IP Video Doorphones
proximity reader built-in:	Access control cards - 13.56 MHz S50
UTP category:	UTP cat. 5e
Alarm inputs:	4 pcs
Relay outputs:	1 pcs NO/NC
RS-485:	✓
Ethernet:	1 x RJ-45 - 10/100 Base-T
Main features:	<ul style="list-style-type: none">• Doorbell button,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Tamper detection - removing from mounting surface,• Ability to work with reed switch and signalling the door being opened too long
Operation temp:	-40 °C ... 70 °C
Power supply:	<ul style="list-style-type: none">• 12 V DC / 1 A,• 24 V PoE
Housing:	Aluminum / Plastic, Waterproof
"Index of Protection":	IP65

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Color:	Silver
Weight:	0.52 kg
Dimensions:	182 x 100 x 33 mm
Supported languages:	English, Polish, Serbian, Hungarian
Manufacturer / Brand:	Hikvision
SAP Code:	305300105
Guarantee:	3 years


PRESENTATION

Front view:



Rear view:



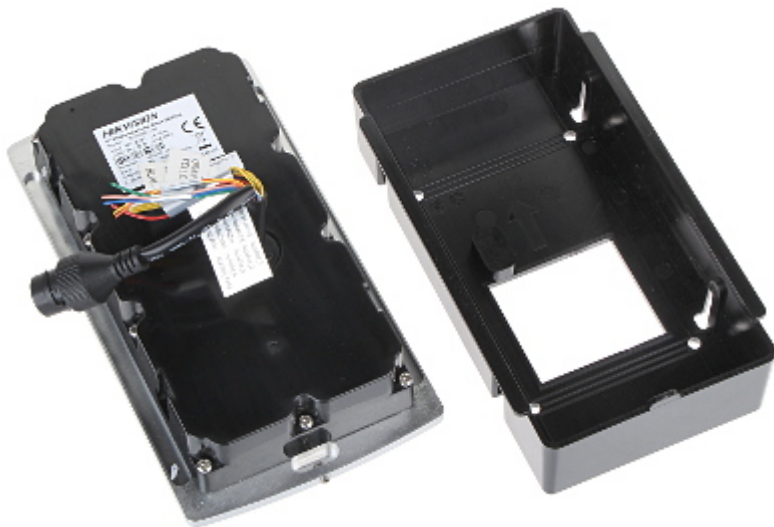


Connectors view:



Connectors description:



Examples of connection diagrams:

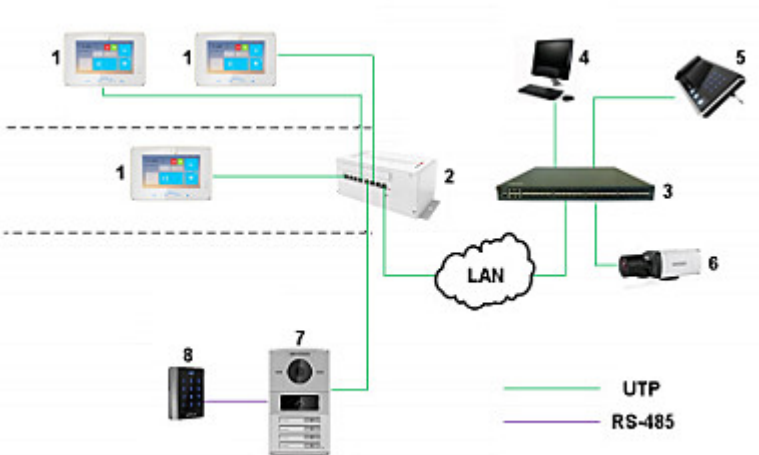

- 1. INDOOR PANEL
- 2. Switch dedicated to intercom systems
- 3. Switch
- 4. Remote client
- 5. System management center
- 6. IP cameras
- 7. Video doorphone

8. Reader with keypad
In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

