

Code: DS-KD-E

PROXIMITY READER MODULE **DS-KD-E** Hikvision

Net: **78.61 EUR** Gross: **78.61 EUR**



The DS-KD-E module is designed to work with the DS-KD8003-IME1 or DS-KD8003-IME2 video doorphone module. Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings). The masking frames attached to the housings of both series are made of aluminum.

SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 5 cm
Autonomous operation:	—
Keyboard built-in:	—
Doorbell button:	—
Tamper output:	—
Compatibility:	DS-KD8003-IME1, DS-KD8003-IME2
Power supply:	Supplied by DS-KD8003-IME1 or DS-KD8003-IME2
Power consumption:	≤ 2 W
Permissible relative humidity:	10 ... 95 % (non-condensing)
"Index of Protection":	IP65
Housing:	Plastic
Color:	Black
Operation temp:	-40 °C ... 60 °C
Weight:	0.17 kg
Dimensions:	100 x 98 x 34 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305301209



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

3 years

PRESENTATION

Front panel:



Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Configuration switches:



Connectors:



Example of application:

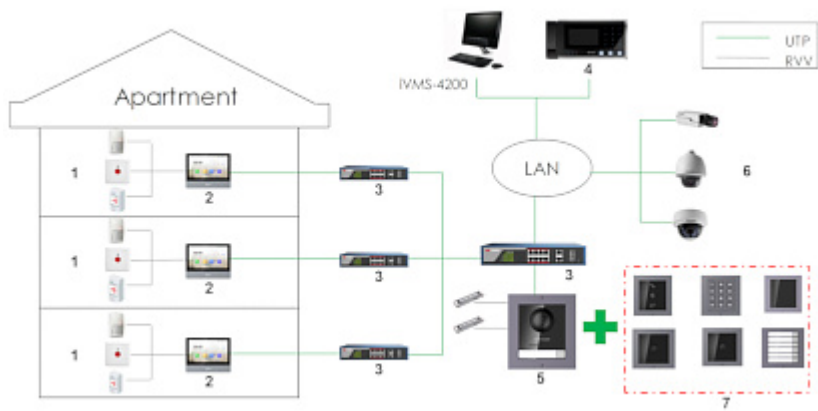

1. Alarm sensors
2. INDOOR PANEL
3. Switch PoE
4. Guard station
5. Main unit powered by PoE switch
6. IP cameras
7. Expansion modules

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

