

Code: DS-KH8350-WTE1/EU

INDOOR PANEL IP DS-KH8350-WTE1/EU Hikvision

Net: 1 334.00 PLN Gross: 1 640.82 PLN

The DS-KH8350-WTE1/EU panel has been designed to create a simple and effective system of local communication.

A device dedicated to work with modular video doorphones Hikvision IP. It can be also used as simple alarm control panel, or notification module by the support 8 alarm inputs.

The device is fully configurable via the **iVMS4200** software. In addition, the device has the ability to work with the **Hik-Connect** application on mobile devices.



SPECIFICATION

Compatibility:	IP Hikvision modular video doorphones
Shield:	7 " - capacitive touch screen IPS
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	<ul style="list-style-type: none">• Wi-Fi module - IEEE 802.11 b/g/n,• Remote opening via a mobile client or software,• Support for capturing a photo during video calls,• Microphone built-in,• Speakers built-in,• Bidirectional communication,• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,• Automatically capture and save photos if there is no response to the bell button,• IP Hikvision cameras support,• The ability of direct communication between two or more panels,• The device operates based on TCP/IP, SIP, RTSP protocols,• Register a short voice message if there is no response to the bell button• The microSD cards support max. 32 GB (not included)• The device is fully configurable via the iVMS4200 software.• In addition, the device has the ability to work with the Hik-Connect application on mobile devices
Controlling:	Touch control keys + capacitive touch screen
Default administrator password:	888999
Default password for securing the zone:	123456
Alarm inputs:	8
Alarm outputs:	2

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC
Power consumption:	≤ 7 W
Housing:	Aluminum
Color:	Silver + Black
Operation temp:	-10 °C ... 55 °C
Weight:	0.35 kg
Dimensions:	180 x 140 x 23 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301482
Guarantee:	3 years

PRESENTATION

Front view:




Memory card slot:



Rear view:



Example of application:

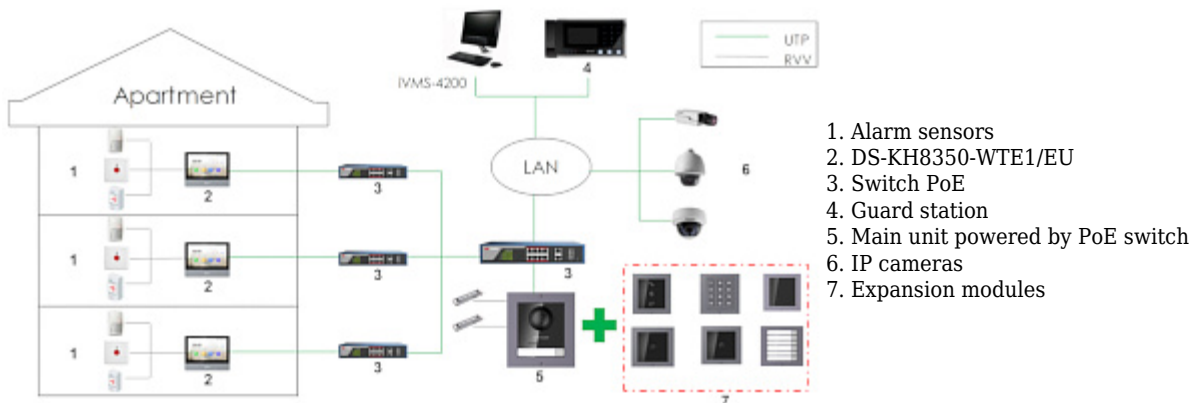

In the kit:

