

Code: DS-KH6320-WTE1-W

## INDOOR PANEL Wi-Fi / IP DS-KH6320-WTE1-W Hikvision

Net: 227.62 EUR Gross: 279.97 EUR

The DS-KH6320-WTE1-W panel has been designed to create a simple and effective system of local communication.

A device dedicated to work with modular video doorphones Hikvision IP. It can be also used as simple alarm control panel, or notification module by the support 8 alarm inputs.

The device is fully configurable via the **iVMS4200** software. In addition, the device has the ability to work with the **Hik-Connect** application on mobile devices.



### SPECIFICATION


Compatibility:	IP Hikvision modular video doorphones
Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	<ul style="list-style-type: none"><li>• Wi-Fi module - IEEE 802.11 b/g/n,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Bidirectional communication,</li><li>• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,</li><li>• Automatically capture and save photos if there is no response to the bell button,</li><li>• IP Hikvision cameras support,</li><li>• The ability of direct communication between two or more panels,</li><li>• Register a short voice message if there is no response to the bell button</li><li>• Support for capturing a photo during video calls</li><li>• The microSD cards support max. 32 GB (not included)</li><li>• The device is fully configurable via the <b>iVMS4200</b> software.</li><li>• In addition, the device has the ability to work with the <b>Hik-Connect</b> application on mobile devices</li></ul>
Controlling:	capacitive touch screen
Default administrator password:	888999
Default password for securing the zone:	123456
Alarm inputs:	8
Alarm outputs:	2

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Power supply:	<ul style="list-style-type: none"> <li>• 12 V DC,</li> <li>• IEEE 802.3af</li> </ul>
Power consumption:	≤ 6 W
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.34 kg
Dimensions:	200 x 140 x 25 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301796
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:

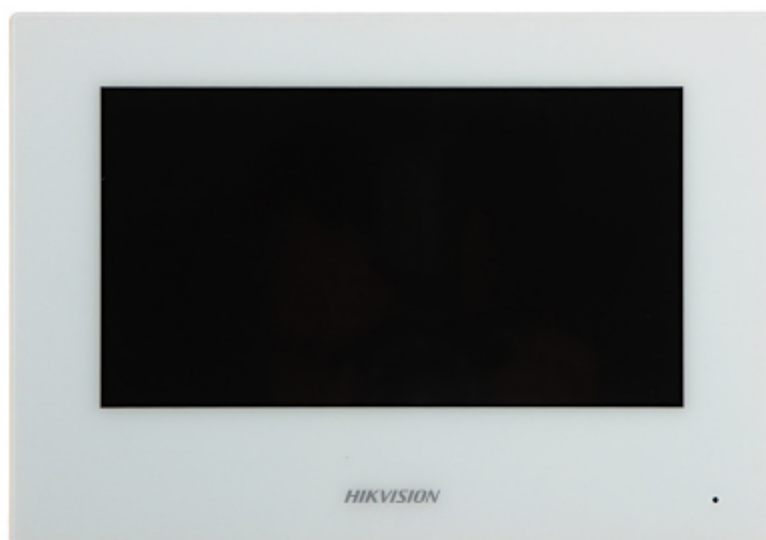

Rear view:




Device connectors:



Memory card slot:



Example of application:

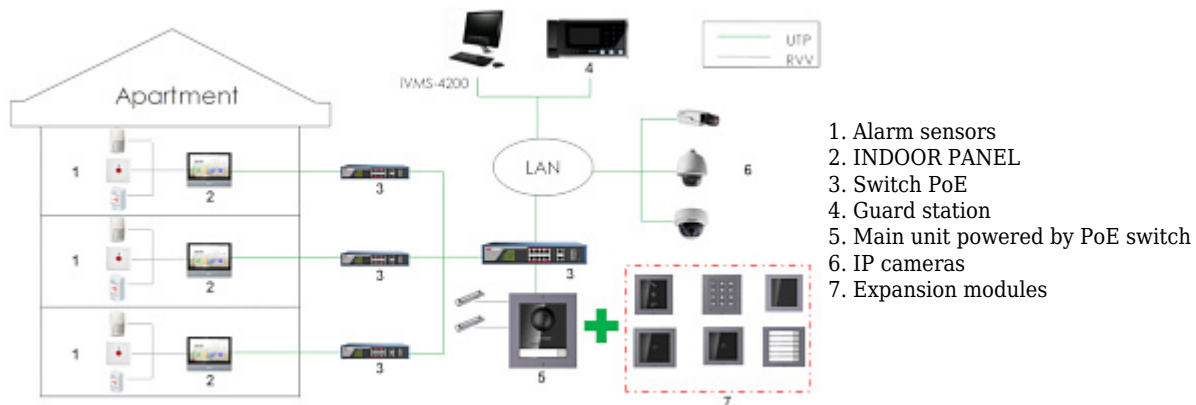

In the kit:

