

Code: DS-KH9310-WTE1(B)

INDOOR PANEL Wi-Fi / IP **DS-KH9310-WTE1(B)** Hikvision

Net: **352.00 EUR** Gross: **352.00 EUR**



The DS-KH9310-WTE1(B) panel has been designed to create a simple and effective system of local communication.

The device is dedicated to work with Hikvision IP video doorphones. It can be also used as simple alarm control panel, or notification module by the support 8 alarm inputs.

The device is fully configurable via the **iVMS4200** software. In addition, the device has the ability to work with the **Hik-Connect** application on mobile devices.

SPECIFICATION


| | |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatibility: | Hikvision IP Video Doorphones |
| Shield: | 7 " - capacitive touch screen |
| Resolution: | 1024 x 600 |
| Internal memory: | 8 GB eMMC (built-in) |
| Main features: | <ul style="list-style-type: none">• Wi-Fi Module - IEEE 802.11 b/g/n,• Microphone built-in,• Speakers built-in,• Bidirectional communication,• Echo suppression and reduction / digital noise reduction,• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,• Automatically capture and save photos if there is no response to the bell button,• IP Hikvision cameras support,• The ability of direct communication between two or more panels,• Register a short voice message if there is no response to the bell button,• Support for capturing a photo during video calls,• User-friendly graphical interface,• The microSD cards support (not included)• The device is fully configurable via the iVMS4200 software.• In addition, the device has the ability to work with the Hik-Connect application on mobile devices |
| Controlling: | capacitive touch screen |
| Default administrator password: | — |
| Default password for securing the zone: | — |
| Alarm inputs: | 8 |
| Alarm outputs: | 2 |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply: | <ul style="list-style-type: none"> • 12 V DC, • PoE (802.3af) |
| Power consumption: | ≤ 8 W |
| Color: | White |
| Operation temp: | -10 °C ... 50 °C |
| Weight: | 0.43 kg |
| Dimensions: | 187 x 137 x 26 mm |
| Supported languages: | Polish, English, Bulgarian, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Romanian, Turkish, Ukrainian, Hungarian, Italian |
| Manufacturer / Brand: | Hikvision |
| SAP Code: | 305303165 |
| Guarantee: | 3 years |

PRESENTATION

Front view:

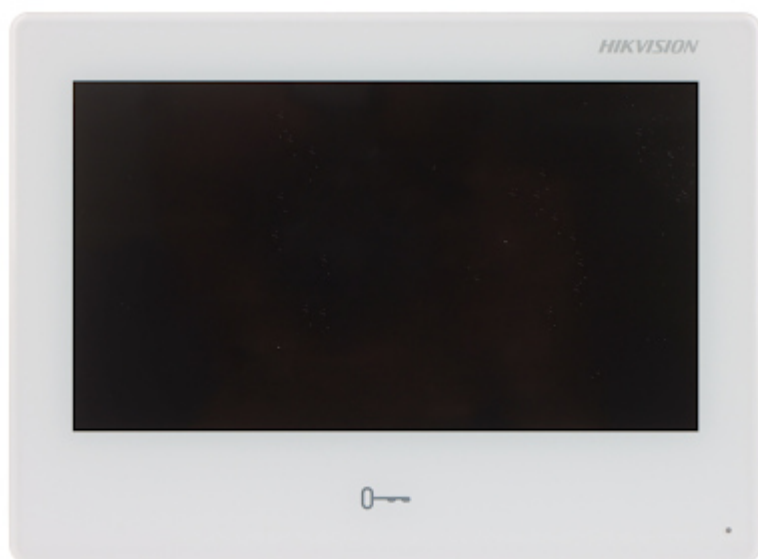


Rear view:





Connectors:




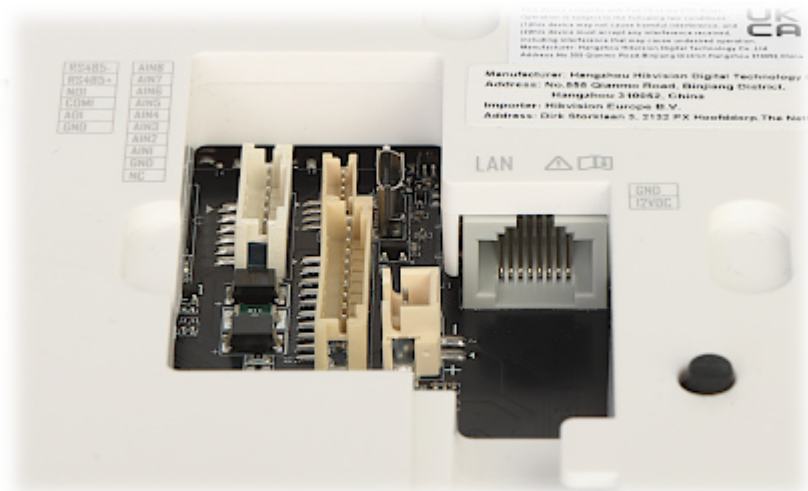

Memory card slot:




Example of application:

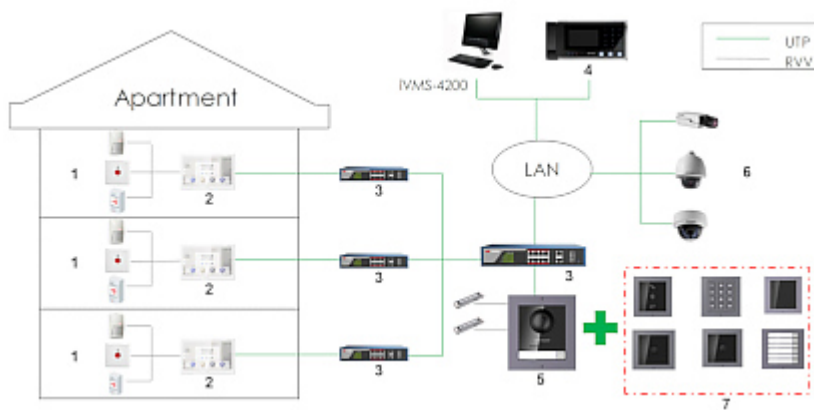

1. Alarm sensors
 2. INDOOR PANEL
 3. Switch PoE
 4. Guard station
 5. Main unit powered by PoE switch
 6. IP cameras
 7. Expansion modules
- In the kit:



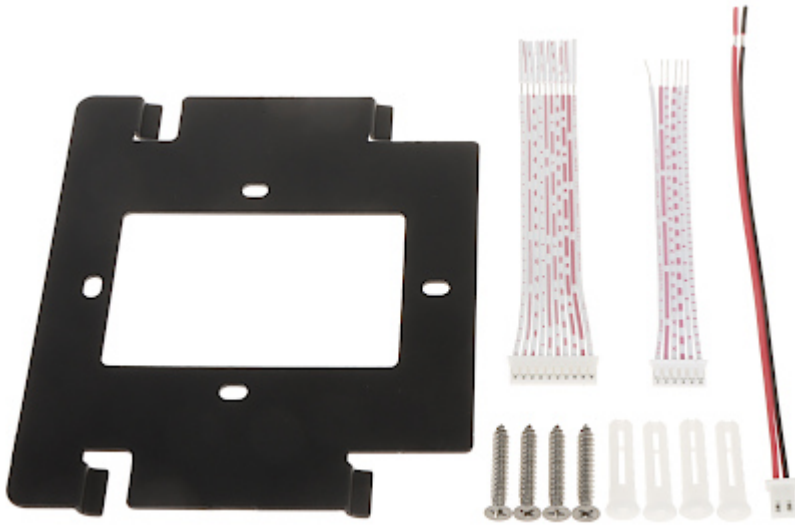

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

