

Code: DS-KIS703-P

## VIDEO DOORPHONE KIT **DS-KIS703-P** Hikvision

Net: **246.42 EUR** Gross: **303.10 EUR**

Two-wire HIKVISION video doorphone kit with 7" touchscreen monitor. The video doorphone enables flush or surface mounting with the DS-KAB8103-IMEX enclosure included in the set.

The device has the ability to work with the [Hik-Connect](#) application for mobile devices.



### SPECIFICATION

Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	144 °
Image compression method:	H.264
IR illuminator:	✓
Network protocols:	TCP/IP, RTSP
Relay outputs:	2 pcs NO/NC
Main features:	<ul style="list-style-type: none"><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Noise suppression and echo cancellation,</li><li>• Tamper detection - removing from mounting surface</li></ul>
Power supply:	24 V DC - HIKVISION 2-wire
Power consumption:	< 10 W
Operation temp:	-40 °C ... 60 °C
Housing:	Metal
Color:	Silver
"Index of Protection":	IP65
Weight:	0.8 kg
Dimensions:	169 x 110 x 51 mm

### INDOOR PANEL:

Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> <li>• Wi-Fi module - IEEE 802.11 b/g/n,</li> <li>• Microphone built-in,</li> <li>• Speakers built-in,</li> <li>• Bidirectional communication,</li> <li>• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,</li> <li>• Automatically capture and save photos if there is no response to the bell button,</li> <li>• IP Hikvision cameras support,</li> <li>• Register a short voice message if there is no response to the bell button</li> <li>• Support for capturing a photo during video calls</li> <li>• The device is fully configurable via the <b>iVMS4200</b> software.</li> <li>• In addition, the device has the ability to work with the <b>Hik-Connect</b> application on mobile devices</li> </ul>
Controlling:	capacitive touch screen
Default administrator password:	The administrator password should be set at the first start
Default password for securing the zone:	123456
Alarm outputs:	—
Power supply:	24 V DC - HIKVISION 2-wire
Power consumption:	≤ 8 W
Color:	Black + Silver
Operation temp:	-10 °C ... 55 °C
Weight:	0.34 kg
Dimensions:	200 x 140 x 25 mm

#### ENCLOSURE:

Material:	Steel - powder painted
Color:	Gray
Weight:	0.61 kg
External dimensions:	185 x 114 x 61 mm

#### General information:

Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305302152
Guarantee:	<b>3 years</b>


#### PRESENTATION



**INDOOR PANEL:**




Front view:

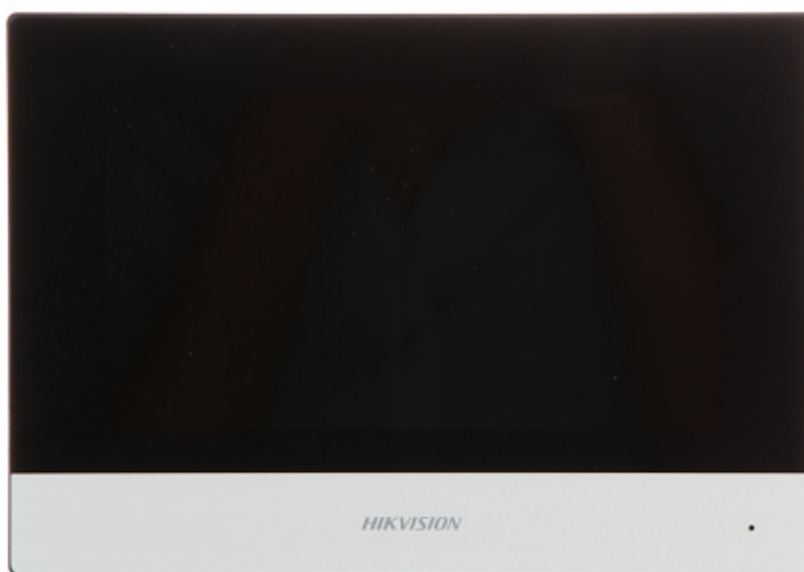

Mounting side view:



Connectors:

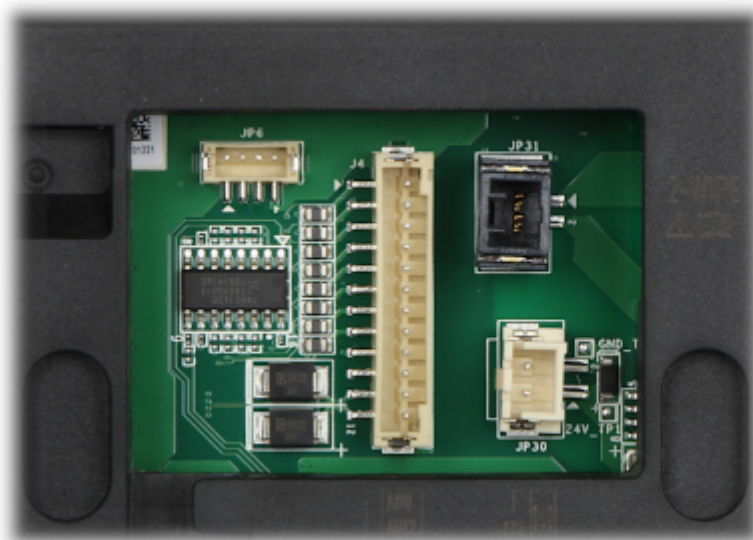

**VIDEO DOORPHONE:**



Rear view:



