

Code: DS-KAD706Y

# SWITCH **DS-KAD706Y** FOR HIKVISION 2-WIRE VIDEO DOORPHONE SYSTEMS

Net: **600.00 PLN** Gross: **600.00 PLN**

The device has 6 2-wire buses for connecting the monitors and external panels (power supply and signal transmission) and 1 Ethernet socket for connecting the LAN network. In addition, one of the ports is adapted to power an extensive gate station with a maximum power consumption of 16W. In addition, the switch is equipped with additional 2-wire bus outputs for cascading connection with DS-KAD706Y / DS-KAD706Y-S.

The switch can also be connected to the LAN network, which allows access to the gate opening and the option of receiving a call from the video doorphone via the mobile application. When connecting a cascade of devices to the LAN network, it is recommended to connect the DS-KAD706Y-S switch to it.



## SPECIFICATION

|                       |                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| Number of ports:      | 6 x HIKVISION 2-wire ( 1 x max. 16 W ) ,<br>2 x HIKVISION 2-wire - Uplink<br>1 x RJ-45                                    |
| Compatibility:        | HIKVISION 2-wire - Y series                                                                                               |
| Main features:        | <ul style="list-style-type: none"><li>• Possibility to connecting in cascade</li><li>• DIN, TS-35 rail mounting</li></ul> |
| Power supply:         | 24 V DC                                                                                                                   |
| Power consumption:    | < 6 W - CH1 ... CH5<br>< 16 W - CH6                                                                                       |
| Housing:              | Plastic                                                                                                                   |
| Operation temp:       | -10 °C ... 55 °C                                                                                                          |
| Weight:               | 0.27 kg                                                                                                                   |
| Dimensions:           | 144 x 90 x 66 mm                                                                                                          |
| SAP Code:             | 305303644                                                                                                                 |
| Manufacturer / Brand: | Hikvision                                                                                                                 |
| Guarantee:            | <b>3 years</b>                                                                                                            |


## PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Connectors view:

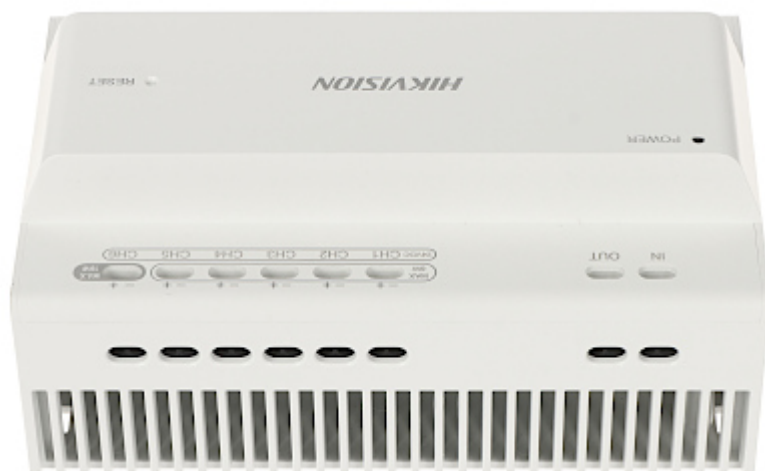

Mounting side view:



Connection schematic diagram:



1. Indoor panel
2. Video doorphone
3. Router
4. Power adapter
5. 1-pair cable
6. Twisted-pair cable
7. Wi-Fi
8. Power supply cable

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|