

Code: DS-KD8003Y-IME2

VIDEO DOORPHONE **DS-KD8003Y-IME2** Hikvision

Net: **190.69 EUR** Gross: **190.69 EUR**



The DS-KD8003Y-IME2 module is the main unit of the video doorphone modular system of Hikvision brand.

The product is compatible with Hikvision 2-wire video intercoms from the Y series.

SPECIFICATION

Compatibility:	HIKVISION 2-wire - Y series
Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	146 °
Image compression method:	H.264
IR illuminator:	✓
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
Main features:	<ul style="list-style-type: none">• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Noise suppression and echo cancellation,• Tamper detection - removing from mounting surface,• Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings)
Power supply:	• 24 V DC - HIKVISION 2-wire
Power consumption:	< 4 W
Operation temp:	-40 °C ... 60 °C
Housing:	Metal

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Color:	Black
"Index of Protection":	IP65
Weight:	0.38 kg
Dimensions:	100 x 98 x 44 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305303988
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:






Connectors view:



In the kit:

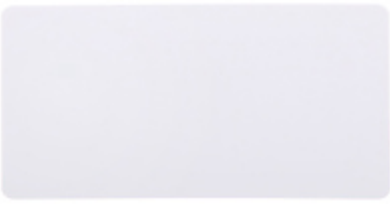

Connection schematic diagram:



1. Indoor Panel
2. Video doorphone
3. Router
4. Power adapter
5. 1-pair cable
6. Twisted-pair cable
7. Wi-Fi
8. Power supply cable

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

