

Code: DS-KIS604-S(B)

VIDEO DOORPHONE KIT **DS-KIS604-S(B)** Hikvision

Net: **446.23 EUR** Gross: **446.23 EUR**

HIKVISION video doorphone set with 7" touch monitor and with the possibility of integration with both the alarm system and video monitoring. Video Doorphone is mounted in a surface housing.

Attention! To ensure proper operation, the "Extend" switch of the switch included in the set should be in the "Off" position.



SPECIFICATION

Compatibility:	IP Hikvision video doorphones II generation
Doorbell button:	1 pcs
proximity reader built-in:	13.56 MHz S50
Sensor:	2 Mpx
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	129 °
Image compression method:	H.264
Supported audio formats:	G.711
IR illuminator:	✓
Network interface:	• 10 / 100 Mbps Ethernet • WiFi
Wireless transmission range:	The range limited only by the availability of the Wi-Fi network
Wi-Fi standard:	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n
Network protocols:	TCP/IP, RTSP
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
RS-485:	✓

Main features:	• Bidirectional communication, • Microphone built-in, • Speakers built-in, • Noise suppression and echo cancellation, • Tamper detection - removing from mounting surface, • WDR - 120 dB - Wide Dynamic Range • BLC - Back Light Compensation • DNR - Digital Noise Reduction • Full support via network : WiFi / LAN • Video Doorphone is mounted in a surface housing • The device has the ability to work with the Hik-Connect application for mobile devices, without the use of an internal panel
Power supply:	• PoE (802.3af), • 12 V DC / 830 mA (max)
Power consumption:	≤ 10 W (operation)
Operation temp:	-40 °C ... 53 °C
Housing:	Aluminum + Plastic, Protects against weather conditions
Color:	Black + Gray
Vandal-proof:	IK08
"Index of Protection":	IP65
Weight:	0.34 kg
Dimensions:	174 x 91 x 30 mm

INDOOR PANEL:

Compatibility:	IP Hikvision modular video doorphones
Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save photos if there is no response to the bell button, • IP Hikvision cameras support, • The ability of direct communication between two or more panels, • Register a short voice message if there is no response to the bell button • Support for capturing a photo during video calls • The microSD cards support max. 32 GB, 16 GB included • The device is fully configurable via the iVMS4200 software. • In addition, the device has the ability to work with the Hik-Connect application on mobile devices
Controlling:	capacitive touch screen
Default administrator password:	— The administrator password should be set at the first start
Default password for securing the zone:	—
Alarm inputs:	8
Alarm outputs:	2
Power supply:	• PoE (802.3af), • 12 V DC
Power consumption:	≤ 6 W
Color:	Black + Silver
Operation temp:	-10 °C ... 55 °C
Weight:	0.33 kg



Dimensions:	200 x 140 x 25 mm
-------------	-------------------

ENCLOSURE:

Number of mounted modules:	1 pcs
Material:	Plastic
Color:	Black
Weight:	0.03 kg
External dimensions:	174 x 91 x 19 mm

SWITCH :

Standards:	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at
LAN ports:	• 1 x RJ45 100 Base-T - Uplink, • 4 x 10/100 Base-T (4 x PoE (802.3af/at)) • 1, 2 - High priority ports
LED diodes:	Power, PoE Max, Link/Act, PoE
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 4 LAN & PoE ports
Management:	—
Maximal output power:	30 W / port PoE
Maximal total power:	35 W
MAC addresses table:	1k
Operation modes:	• Extend On : 300 m, 10 Mbps @ UTP cat. 5e, 6 - 1 ... 4 ports • Extend Off : 100 m, 100 Mbps @ UTP cat. 5e, 6
Operation temp:	-10 °C ... 55 °C
Power supply:	48 V DC / 800 mA (power adapter included)
Weight:	0.2 kg
Dimensions:	105 x 86 x 28 mm

General information:


Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305302413
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

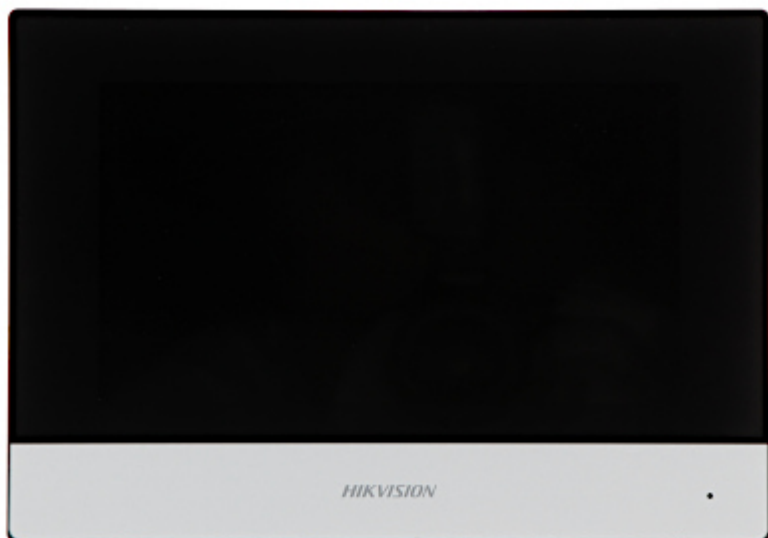

Mounting side view:



Connectors:



Memory card slot:




VIDEO DOORPHONE:



Mounting side view:



Connectors:

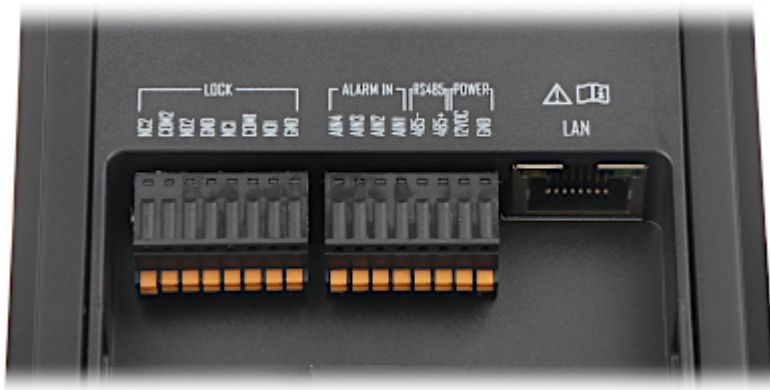

SWITCH :




Connectors:



Power adapter:



In the kit:

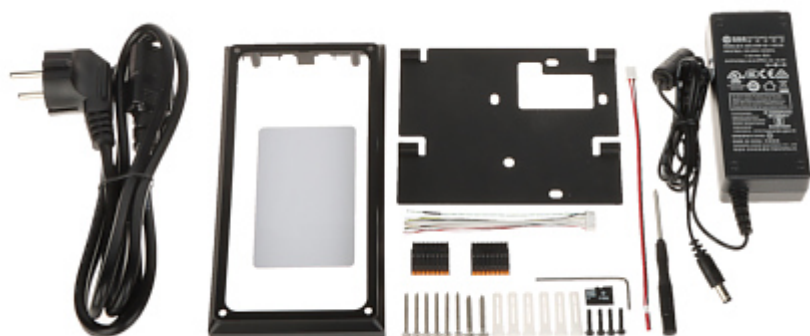

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------