

Code: S-21

SATELLITE METER **S-21** DVB-S/S2/S2X Spacetronek

Net: **63.80 EUR** Gross: **63.80 EUR**

The S-21 allows to measure the TV signals at DVB-S/S2/S2X installations. Readable menu will help the operation for any installer.



SPECIFICATION

Output and input:	1 pcs F socket, 1 pcs micro USB, 1 pcs 2.1/5.5 mm socket
Display:	2.4 " TFT LCD
Frequency range:	950 MHz ... 2150 MHz - DVB-S / DVB-S2 / DVB-S2X
Signal level:	-25 ... -65 dBm
LNB power supply:	13 / 18 V, 350 mA
Switching between bandwidths:	0 / 22 kHz
DiSEqC:	DiSEqC 1.0, 1.1, 1.2, USALS systems support
Antenna powering:	—
Video signal test:	—
Programming and firmware upgrade:	via micro USB port
Battery power supply:	• Li-Ion battery 7.4 V / 2500 mAh • 12 V / 1 A (power adapter included)

Main features:	• Measurement of signal strength and quality • Signal indicator : LED display / Beep signal • Measurement of BER, PWR, SNR • Spectrum measurement mode • Support for a satellite dish motor • Constellation diagram • UNICABLE technology support • Support loop search function (signal preview on 8 frequencies simultaneously) • Signal lock audible notification • Clear graphical interface • OSD menu full in Polish • Long standby time • Low power consumption • Compass • Flashlight built-in • Illuminated buttons • Anti-shock silicone case
Weight:	0.29 kg
Dimensions:	166 x 94 x 41 mm
Supported languages:	Polish, English, French, Spanish, German, Portuguese, Russian, Italian
Manufacturer / Brand:	Spacetronik
Guarantee:	2 years

PRESENTATION

Front panel:



Side view:



Top view:




Rear view:





Place for battery:



OSD menu:

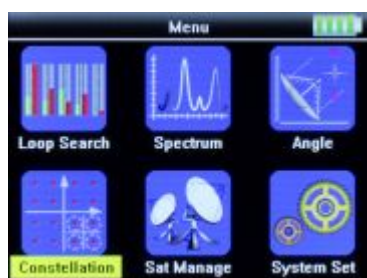

Sat Setting	
Sat Name	TelStar 18-Ku
Longitude	E 138.0
Lnb Freq	11300/11300
Lnb Power	13W/18V
22K	AUTO
Type	DISEqC
DISEqC	1.0 [4]
Motor	OFF

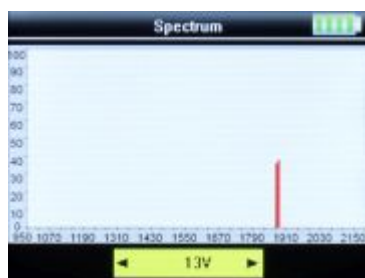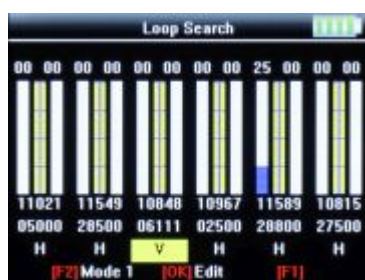



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------