

Code: STC-45

UNIVERSAL METER **STC-45** DVB-T/T2 DVB-S/S2 DVB-C Spacetronek

Net: **196.84 EUR** Gross: **196.84 EUR**

The STC-45 allows to measure the TV signals at DVB-T/T2, DVB-S/S2, DVB-C installations. Readable menu will help the operation for any installer.



SPECIFICATION

Output and input:	1 pcs F plug, 1 pcs IEC socket, 1 pcs mini USB, 1 pcs 2.1/5.5 mm socket, 1 pcs 1.35/3.5 mm socket
Display:	4.3 " TFT LCD
Frequency range:	• DVB-T / DVB-T2, • DVB-C, • DVB-S / DVB-S2
LNB power supply:	13 / 18 V
Switching between bandwidths:	0 / 22 kHz
DiSEqC:	DiSEqC 1.0, 1.1, 1.2, USALS systems support
Antenna powering:	0 V / 5 V / 12 V / 24 V
Video signal test:	✓
Programming and firmware upgrade:	via micro USB port
Battery power supply:	• Li-Ion battery 7.4 V / 5000 mAh • 12 V / 2 A (power adapter included)

Main features:	• Measurement of signal strength and quality • Signal indicator : LED display / Beep signal • Measurement of BER, MER • Spectrum measurement mode • LNB overvoltage protection • LNB indicator and short-circuit protection • Support for a satellite dish motor • UNICABLE technology support • Signal lock audible notification • Clear graphical interface • OSD menu full in Polish • Ability to test signals from CCTV cameras in AHD / HD-CVI / HD-TVI standards with resolutions up to 8 Mpx • Long standby time • Low power consumption • Compass • Flashlight built-in • Illuminated buttons • Anti-shock silicone case
Weight:	0.66 kg
Dimensions:	207 x 137 x 52 mm
Supported languages:	Polish, English, Spanish, Portuguese, Russian, French
Manufacturer / Brand:	Spacetronik
Guarantee:	2 years

PRESENTATION

Front panel:



Side view:



Top view:



Rear view:








Place for battery:



OSD menu:



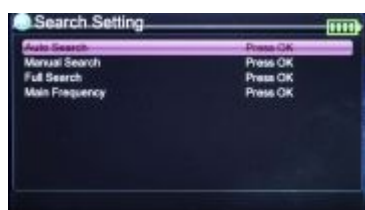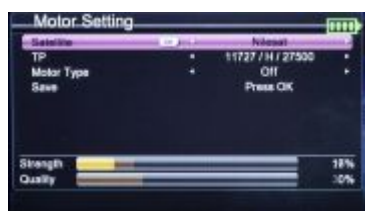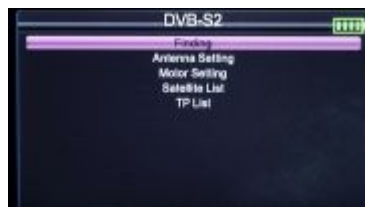

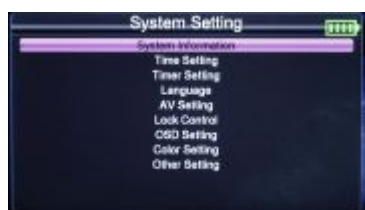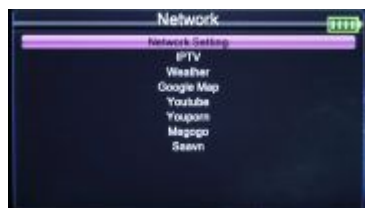

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------