

AHD, HD-CVI, HD-TVI, CVBS CAMERA HAC-HDW1509T-A-LED-0280B-S2**Full-Color - 5 Mpx 2.8 mm DAHUA**Net: **112.27 EUR** Gross: **138.09 EUR**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

Camera is according to IP67 Index of Protection norm.

Attention! The camera of the Full-color series does not have a black and white mode. Thanks to fit the camera in a very sensitive sensor and the LED illuminator emitting visible light in white, the device allows to obtain a clear, colorful image in all lighting conditions. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

**SPECIFICATION**

| | |
|------------------------------------|---|
| Standard: | AHD, HD-CVI, HD-TVI, CVBS |
| Sensor: | Progressive Scan CMOS |
| Matrix size: | 5 Mpx |
| Resolution: | <ul style="list-style-type: none"> • 2880 x 1620 - 5 Mpx @ HD-CVI @ 25 fps - Aspect Ratio 16 : 9, • 2560 x 1440 - 4 Mpx @ AHD / HD-CVI / HD-TVI @ 25 fps, • 1920 x 1080 - 1080p @ HD-CVI @ 25 fps, • 960 x 576 - 960H @ PAL |
| Lens: | 2.8 mm |
| View angle: | <ul style="list-style-type: none"> • 112 ° (manufacturer data) • 107 ° (our tests result) |
| White light LED illuminator range: | 40 m |
| Video output: | AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω |
| Audio: | <ul style="list-style-type: none"> • Microphone built-in • Audio support via coaxial cable - HD-CVI only |
| OSD menu: | OSD menu available via DAHUA recorder |
| Main features: | <ul style="list-style-type: none"> • Possibility to turn off the LED illuminator • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • Auto White Balance • AGC - Automatic Gain Control • Mirror - Mirror image • Privacy zones - max. 8 • Sharpness - sharper image outlines |


| | |
|------------------------|------------------|
| "Index of Protection": | IP67 |
| Power supply: | 12 V DC / 540 mA |
| Power consumption: | ≤ 6.4 W |
| Housing: | Dome, Metal |
| Vandal-proof: | — |
| Color: | White |
| Operation temp: | -40 °C ... 60 °C |
| Weight: | 0.48 kg |
| Dimensions: | Ø 106 x 94 mm |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

PRESENTATION

Camera is out from clamping ring:



Mounting side view:

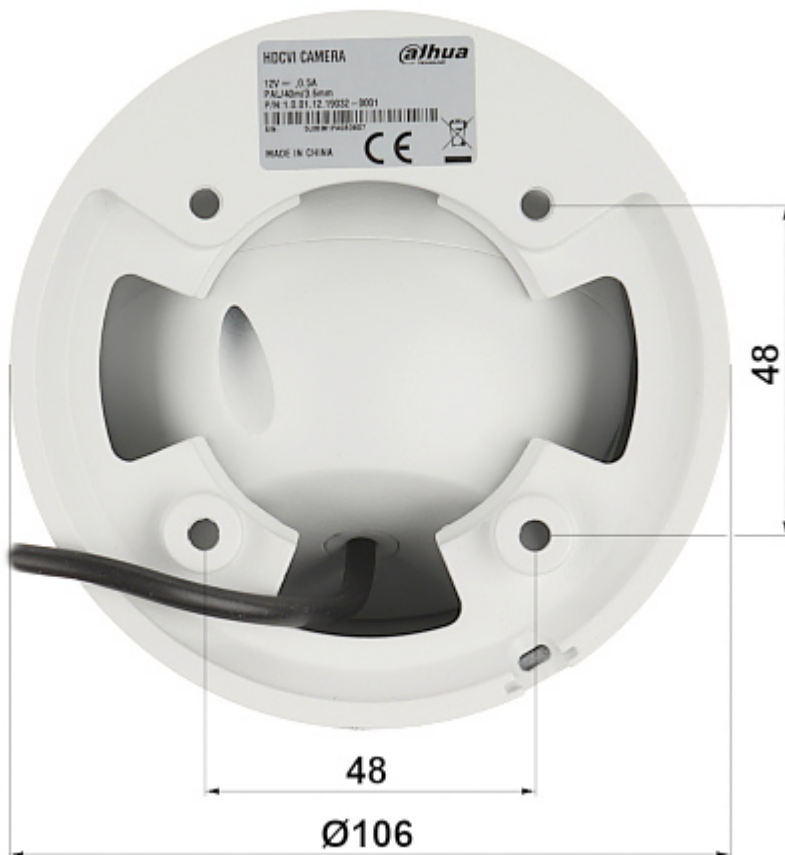

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in LED illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in LED illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in LED illuminator on:



Camera image at direct strong light opposite to camera:

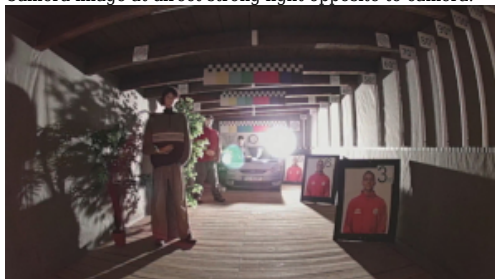

OUR OPINIONS



- Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

