

Code: APTI-BG-1T

TRIPOD TURNSTILE **APTI-BG-1T**

Net: **762.14 EUR** Gross: **762.14 EUR**

The APTI-BG-1T turnstile is designed to work with access control systems in facilities requiring high passage capacity, such as: airports, metro stations, market halls, concert halls, swimming pools, sports halls, etc. The maximum capacity of the gate is approx. 30 persons per minute. Both unidirectional and bidirectional door control is possible. In addition, power failure leaves the gate open to facilitate the evacuation of people from the premises.

Attention! The gate does not have built-in readers and controller. RFID card readers are available separately, after purchase, install them in dedicated places on the device housing and configure the system.



SPECIFICATION

Control operating voltage:	12 V DC
Motor operating voltage:	24 V DC
Gate passing speed:	max. 30 persons/min
The length of the gate arm:	500 mm
Passage width:	≥ 550 mm
Voltage control:	NO/NC
RS-485:	✓
Main features:	• The gate can be operated in one or both directions • Leaving the door open after a power failure • Possibility of voltage control or via RS-485 interface • Housing made of stainless steel • LED display informing about the status of the gate (entry / exit / door blockade)
Power supply:	230 V AC
Allowable uninterrupted operation time:	unlimited
Weight:	27.7 kg
Dimensions:	1195 x 280 x 980 mm
Manufacturer / Brand:	ATLO
Guarantee:	3 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Leaving the door open after a power failure:



Side view:





Cabling and components controlling the gate are located in the upper beam, behind the key-locked cover:



Internal view of the housing:



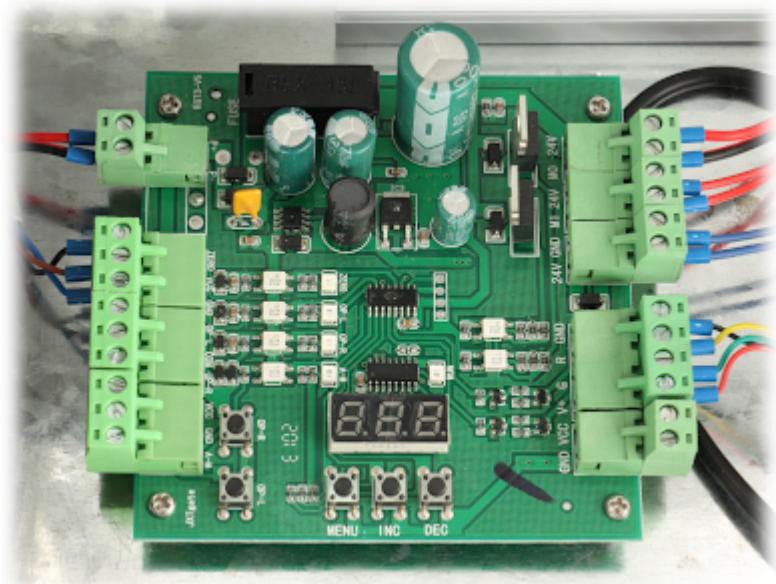

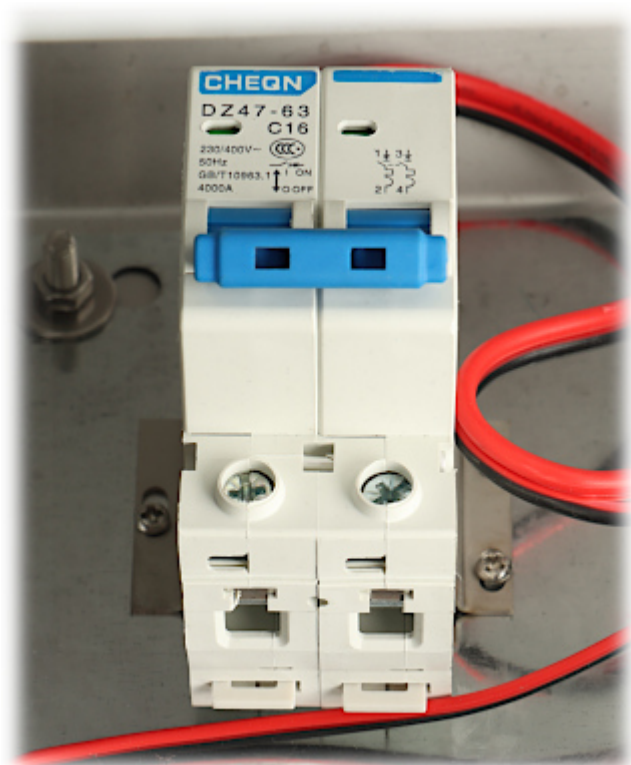


Side posts have lockable covers enabling access to the inside of the post:





Dimensions:

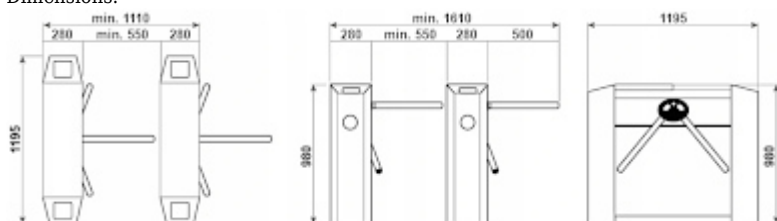

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------