

Code: DS-K3G501SX-R/M-DM55

TRIPOD TURNSTILE **DS-K3G501SX-R/M-DM55** Hikvision

Net: 2 605.79 EUR Gross: 2 605.79 EUR



The DS-K3G501SX-R/M-DM55 turnstile is designed to work with access control systems in facilities requiring high passage capacity, such as: airports, metro stations, market halls, concert halls, swimming pools, sports halls, etc. The maximum capacity of the gate is approx. 35 persons per minute. Both unidirectional and bidirectional door control is possible. In addition, power failure leaves the gate open to facilitate the evacuation of people from the premises.

SPECIFICATION

Gate passing speed:	~ 35 persons/min
The length of the gate arm:	522 mm
Passage width:	550 mm
RFID readers:	13.56 MHz S50
RS-232:	x 4
RS-485:	x 4
Main features:	• The gate can be operated in one or both directions • Leaving the door open after a power failure • Remote control and management • TCP/IP network communication - communication data is specially encrypted • Fire alarm mode - when triggered, the barrier will automatically lower for evacuation • 180 000 events buffer • Number of supported proximity cards : 60 000 • LED display informing about the status of the gate (entry / exit / door blockade) • Possibility of voltage control or via RS-485 interface • Housing made of stainless steel : SUS304
Power supply:	230 V AC
Allowable uninterrupted operation time:	unlimited
Operation temp:	-20 °C ... 65 °C
Permissible relative humidity:	0 % ... 95 %
Weight:	41 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	1208 x 960 x 728 mm
SAP Code:	314608732
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION





Leaving the door open after a power failure:



Internal view of the housing:



Device connectors:

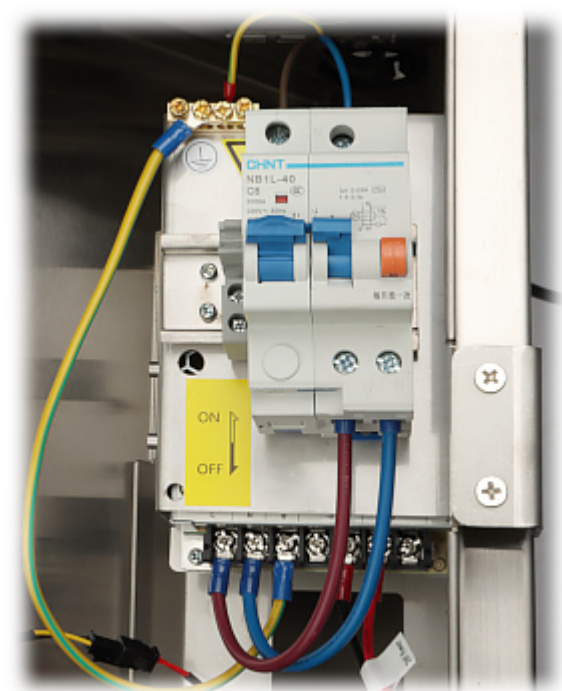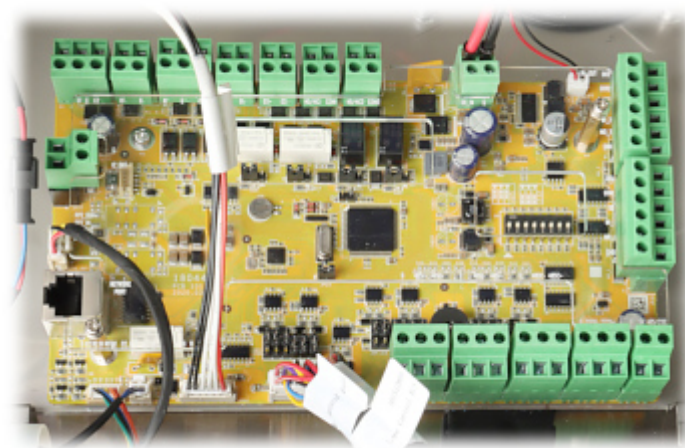




Side posts have lockable covers enabling access to the inside of the post:



Dimensions:

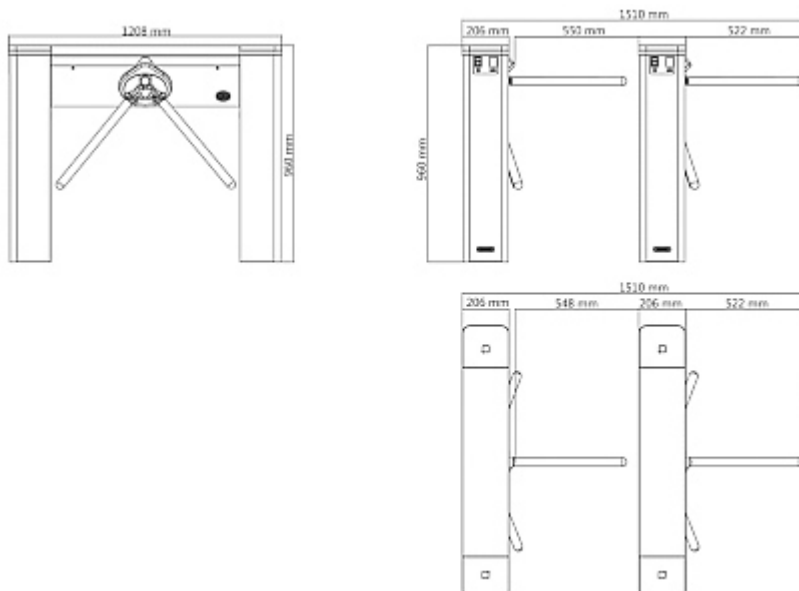

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------