

Code: APTI-W28S2-TUYA

IP PTZ CAMERA INDOOR **APTI-W28S2-TUYA** Wi-Fi - 1080p 3.6 mm

Net: 167.09 PLN Gross: 205.52 PLN

The cameras cooperating with the user-friendly Tuya platform have been designed with special care to simplify the configuration process and enable the user to create a simple and effective monitoring system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. The used Wi-Fi module allows to remote communication with camera for max. distance up to 30 m.

Attention! Camera for indoor applications powered by AC 230V with E27 thread. Devices cooperating with the Tuya platform do not have a WEB interface. The camera works only with the mobile application (the camera does not work with recorders). Controlling the device and schedule settings is possible if the device has access to the Internet.



SPECIFICATION

Standard:	TCP/IP
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	3.6 mm
View angle:	<ul style="list-style-type: none">• 85 ° (manufacturer data)• 70 ° (our tests result)
Range of IR illumination:	30 m
Horizontal rotation range:	• 0 ° ... 355 ° - Rotation of the head is limited by stops
Vertical rotation range:	• 0 ° ... 90 °
Audio:	<ul style="list-style-type: none">• Microphone built-in,• Speaker built-in,• Audio transmission via network,• Bi-directional audio streaming support
Image compression method:	Smart H.264
Network protocols:	TCP/IP
Network interface:	Wi-Fi - IEEE 802.11 b/g/n
ONVIF:	—
WEB Server:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Access by a cloud (P2P) <ul style="list-style-type: none"> • The Tuya Smart free application on Android • The Tuya Smart free application on iOS
Default IP address:	DHCP
Web browser access ports:	—
PC client access ports:	—
Mobile client access ports:	—
Port ONVIF:	—
RTSP URL:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Main features:	<ul style="list-style-type: none"> • Wi-Fi Module - IEEE 802.11 b/g/n, Range : 30 m (open area) • Video PUSH personal messaging • Motion Detection • Sound signaling • ICR - Movable InfraRed filter • RESET button
Power supply:	230 V AC - E27 thread
Power consumption:	≤ 6 W
Housing:	Plastic
Weight:	0.21 kg
Dimensions:	Ø 70 x 153 mm
Operation temp:	-10 °C ... 55 °C
Supported languages:	English
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION





Rear view:



Memory card slot, micro USB and "Reset" button:



Mounting side view:




E27 thread:



In the kit:



Example captures of device interface:

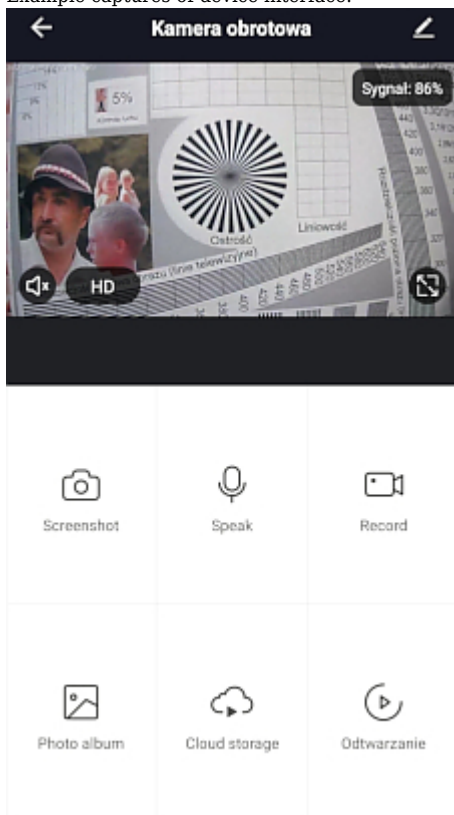

OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------